

EF 124 *XSafe*

Self Contained Ice Machine 122 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |



FEATURES

- Produces granular shape ice flakes, 80% hardness.
- Ice scoop holder safely positioned in ice-storage bin.
- Advanced diagnostics computerized control.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled version only). Easily accessible, front panel mount, ON-OFF Switch.
- Easy, front panel access to technical / service area of the machine.
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EF 124
Flake ice
Residual water content 25%

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

40 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

| | Minimum | Maximum |
|--------------------|----------------|----------------|
| Air temperature | 10 | 43 |
| Water temperature | 5 | 38 |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 122 kg

EF 124 XSafe

Self Contained Ice Machine 122 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |

Self Contained Ice Machine 122 kg

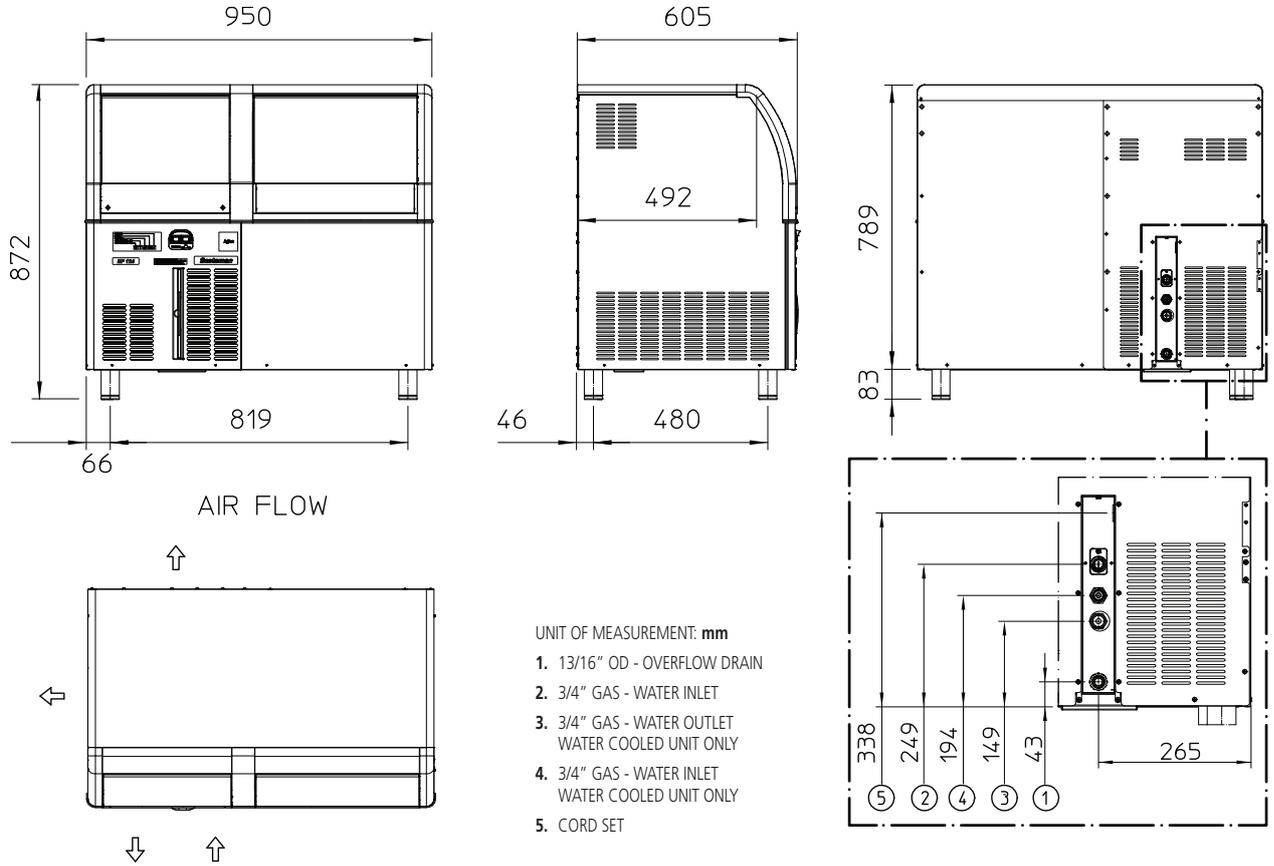

| UNIT DATA | | SHIPPING DATA | | | | | | | | | | |
|------------------|--------------------|--|---------------------|-----------|------------------------|---------|-----------------|---------------|------------|---------------|----------------|--|
| Size (W x D x H) | 950 x 605 x 872 mm | Carton (W x D x H) | 1030 x 680 x 960 mm | | | | | | | | | |
| Net weight | 68 kg | Weight | 79 kg | | | | | | | | | |
| | | 24 h ice production kg °C Amb. / °C Water | | | Energy consumption (*) | | Water usage (*) | Instant power | Compressor | Circuit wires | Max. fuse size | |
| Version | Voltage | 10°C/10°C | 21°C/10°C | 32°C/21°C | kWh/100 kg | kWh/24h | l/h | W | W | No. x Ømm² | A | |
| EF 124 AS | 230/50/1 | 122 | 113 | 91 | 12.5 | 11.4 | 3.9 | 510 | 1200 | 3 x 1.5 | 10 | |
| EF 124 WS | 230/50/1 | 118 | 110 | 92 | 12.0 | 11.0 | 27.0 | 450 | 1200 | 3 x 1.5 | 10 | |

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions