

CO133T - Lincat Convector Touch Electric Counter-top Convection Oven - W 610 mm - D 750 mm - 3.0 kW

- ♂ 3 x GN2/3 capacity
- Touchscreen control with easy-to-use icon-driven menu selections
- Easy-view traffic light status see the status of the oven at a glance, even in the noisiest kitchens
- Space for 24 programs with up to four stages, which can be adjusted individually

Able to roast, braise, bake and reheat, a CO133T Convector convection oven is a powerful addition to any commercial kitchen.

- Up to four-stage phased cooking for perfect results - set temperature, time, fan speed and humidity injection for each stage
- Even heat distribution thanks to electronically controlled two-speed, bi-directional fan
- Five levels of humidity injection
- Nine-hour on-screen timer, with electronic buzzer, and flashing oven lamps to indicate that cycle has finished

### Specifications

#### Summary

Brand Range Series Power Type Unit Type Available in UK Only UK Warranty Export Warranty GTIN

#### Lincat Convector Touch Electric Counter-top No 2 Years Parts and Labour Warranty Contact your local dealer 5056105118251

#### **Power and Performance**

Total Power kW Temperature Range °C IP Rating Controls Position Temperature Control Timer Range mins Oven Rating kW 3.0 30-260 IP23 Right hand side Electronic 1-540 2.8

## lincat

## CONVECTOR

Key Specifications		Capacity	
Stackable	Yes (with optional kit)	Gastronorm Capacity	3 × GN2/3
Feet Height/Type	55mm/adjustable	Shelf Spacing mm	80
Continuous Plug-In Door Seal	Yes	Sheet Pan Capacity	3 x 460 mm x 330 mm
Removable Inner Door Glass	Yes	Capacity Litres	53.0
Handle Type	Grab		
Vented Door	Yes		
Reversible Door	No		
Door Type	Drop down		
Number of Cooking Phases	4		
Phased Cooking	Yes		
Shelf Timer(s) (Number)	Yes(4)		
Grill Element/Mode	No		
Core Temp Probe	No		
Steam Injection	Yes		
Fan(s) Speed	2		
Fan(s) Type	Bi-Directional		
Number of Fan(s)	1		
Euronorm Compatible	No		
Sheet Pan Compatible	Yes		
Removeable Shelf Guides	Yes		
Manual Mode	Yes		
Programmable	Yes		
Number of Programs	24(4 stages)		
Timer Type	Touchscreen		
Display Type	Touchscreen		
Number of Shelves included	3		
Number of Shelf Positions	3		
Type of Lighting	Halogen Bulb		
Construction/Finish	304 S/S cavity		
GN Compatible	Yes		
Weights and Dimensions		Supply Connections	
Unit Height (External) mm	645	Requires Installation	No


Unit Height (External) mm	645	Requires Installation	No
Unit Width (External) mm	610	Requires Electrical Supply	Yes
Unit Depth (External) mm	750	UK 3 Pin Plug	Yes
Height (Internal) mm	308	Requires Hardwiring	No
Width (Internal) mm	490	Electrical Supply Rating Watts	3,000
Depth (Internal) mm	370	Single Phase Amps	13.0
Shelf Dimensions Width mm	460	Single Phase Voltage	230
Shelf Dimensions Depth mm	325	Water Connection Pressure Bar	2.0-6.0
Net Weight Kg	62.1	Drain Connection	No
		Water Connection	3/4" BSPT
		USB Port	Yes

## Shipping

Packed Weight Kg	68.31
Packed Height cm	81.5
Packed Width cm	70
Packed Depth cm	95

Available Accesso	pries
ACIK04	Water Treatment Filter Kit
CO100/FS	Lincat Convector Floor Stand for C0133M/C0133T Convection Ovens - with 4 Runners - W 610 mm
CO100/LFSK	Lincat Convector Low Floor Stand and Stacking Kit for C0133M/C0133T Convection Ovens - with 1 Runner - W 610 mm

## **Technical Picture**

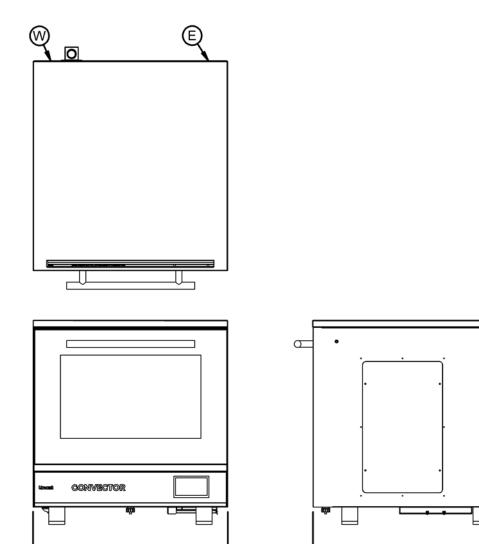

# Lincat fift

610

**Customer Care** 

Tel: +44 1522 875500

Email: care@lincat.co.uk

#### Lincat Limited

Whisby Road, Lincoln, LN6 3QZ,

United Kingdom

**Company No:** 2175448

A member company of



Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

655·

**Opening Hours** 

645-

Monday – Friday: 8.30am – 5pm