



## C0235M - Lincat Convector Manual+ Electric Counter-top Convection Oven - W 810 mm - D 850 mm - 4.8 kW

Able to roast, braise, bake and reheat, a C0235M Convector convection oven is a powerful addition to any commercial kitchen.

- ✓ 3 x GN1/1 capacity
- ✓ Easy-to-use knob-driven control, and electronic fan control
- ✓ Mechanical temperature control from 60° to 260° C
- ✓ Even heat distribution thanks to electronically controlled two-speed, bi-directional fan
- ✓ Two fan speeds - standard for general use and slow for delicate items
- ✓ 120 minute count down timer with electronically-controlled buzzer
- ✓ Oven lamps flash when cook cycle has finished - see when your food is done even in the busiest kitchen

### Specifications

Summary		Power and Performance	
<b>Brand</b>	Lincat	<b>Total Power kW</b>	4.8
<b>Range</b>	Convector	<b>Temperature Range °C</b>	60-260
<b>Series</b>	Manual+	<b>IP Rating</b>	IP23
<b>Power Type</b>	Electric	<b>Controls Position</b>	Right hand side
<b>Unit Type</b>	Counter-top	<b>Temperature Control</b>	Mechanical
<b>Available in UK Only</b>	No	<b>Timer Range mins</b>	1-120
<b>UK Warranty</b>	2 Years Parts and Labour Warranty	<b>Oven Rating kW</b>	4.6
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN</b>	5056105118282		




Key Specifications		Capacity	
Stackable	Yes (with optional kit)	<b>Gastronorm Capacity</b>	3 x GN1/1
Feet Height/Type	55mm/adjustable	<b>Euronorm Capacity</b>	3 x 600 mm x 400 mm
Continuous Plug-In Door Seal	Yes	<b>Shelf Spacing mm</b>	90
Removable Inner Door Glass	Yes	<b>Sheet Pan Capacity</b>	3 x 660 mm x 460 mm
Handle Type	Grab	<b>Capacity Litres</b>	96.0
Vented Door	Yes		
Reversible Door	No		
Door Type	Drop down		
Phased Cooking	No		
Shelf Timer(s) (Number)	No		
Grill Element/Mode	No		
Core Temp Probe	No		
Steam Injection	No		
Fan(s) Speed	2		
Fan(s) Type	Bi-Directional		
Number of Fan(s)	1		
Euronorm Compatible	Yes		
Sheet Pan Compatible	Yes		
Removeable Shelf Guides	Yes		
Manual Mode	Yes		
Programmable	No		
Timer Type	Mechanical		
Number of Shelves included	3		
Number of Shelf Positions	3		
Type of Lighting	Halogen Bulb		
Construction/Finish	430 S/S cavity		
GN Compatible	Yes		

Weights and Dimensions		Supply Connections	
Unit Height (External) mm	645	<b>Requires Installation</b>	Yes
Unit Width (External) mm	810	<b>Requires Electrical Supply</b>	Yes
Unit Depth (External) mm	850	<b>UK 3 Pin Plug</b>	No
Height (Internal) mm	308	<b>Requires Hardwiring</b>	Yes
Width (Internal) mm	690	<b>Electrical Supply Rating Watts</b>	4,800
Depth (Internal) mm	470	<b>Single Phase Amps</b>	20.5
Shelf Dimensions Width mm	660	<b>Single Phase Voltage</b>	230
Shelf Dimensions Depth mm	425	<b>Three Phase Amps</b>	L1=6.9; L2=6.9; L3=6.9
Net Weight Kg	80.6	<b>Three Phase Voltage</b>	400
		<b>USB Port</b>	No

Shipping	
<b>Packed Weight Kg</b>	88.66
<b>Packed Height cm</b>	81.5
<b>Packed Width cm</b>	88
<b>Packed Depth cm</b>	100

Available Accessories	
<b>CO200/FS</b>	Lincat Convector Floor Stand for CO223M/CO223T/CO235M/CO235T Convection Ovens - with 4 Runners - W 810 mm
<b>CO200/LFSK</b>	Lincat Convector Low Floor Stand and Stacking Kit for CO223M/CO223T/CO235M/CO235T Convection Ovens - with 1 Runner - W 810 mm

## Technical Picture

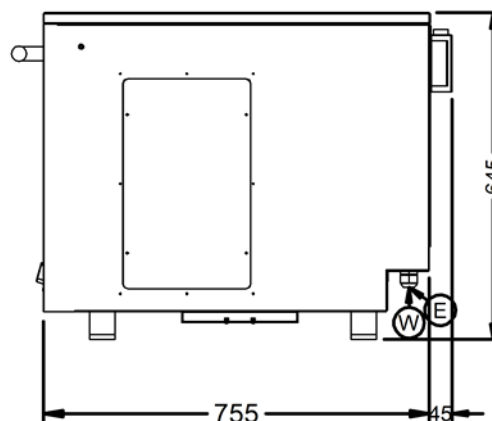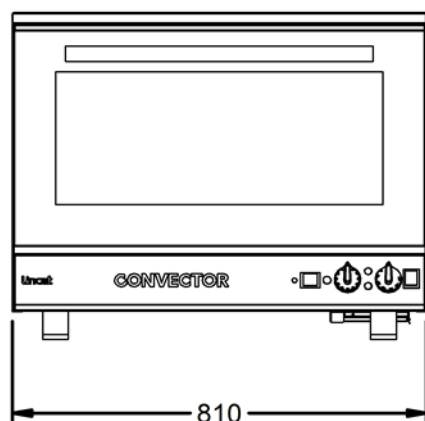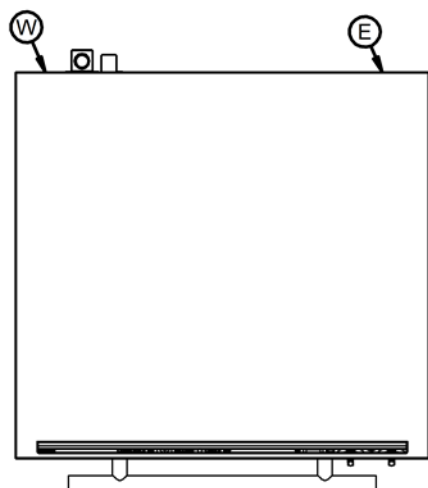

#### Lincat Limited

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



#### Customer Care

**Tel:** +44 1522 875500

**Email:** care@lincat.co.uk

#### Export Customers

**Tel:** +44 1522 875536

**Email:** export@lincat.co.uk

#### Opening Hours

**Monday – Friday:**

8.30am – 5pm