Lincat Combi Ovens



LC106B/P - Lincat Visual Cooking 1.06 Propane Gas Counter-top Combi Oven - Boiler - W 897 mm - 13.0 kW [Gas] + 1.0 kW [Electric] Choose Visual Cooking where high output and precise control are required.

- Intuitive touch display SmartTouch® for programming
- Efficient, controlled production and injection of steam, with hybrid boiler and injection steam production
- CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- Ability to create cooking programmes with up 15 steps

- Rack timer allowing accurate cooking times for different items on different shelves
- 6 x GN1/1 capacity
- Ideal for menus which require a high volume of steaming
- Two-step safety handle

Specifications

Specifications			
Summary		Power and Performance	
Brand	Lincat	Total Power kW	1
Range	Lincat Combi Ovens	Temperature Range °C	30-300
Series	Visual Cooking	IP Rating	IPX5
Power Type	Gas	Temperature Control	Electronic
Gas Type	Propane Gas	Oven Rating kW	Steam connection = 11.0;Hot air
Unit Type	Counter-top		connection = 13.0
Available in UK Only	Yes		
UK Warranty	2 Years Parts and Labour Warranty		
GTIN	5056105120223		
Key Specifications		Capacity	
WRAS Approved	Yes	Gastronorm Capacity	6 × GN1/1
Type of Lighting	Halogen	Portions per Day	90
Number of Grids included	0		

Type of Lighting Number of Grids included	Halogen O	Portions per Day	90
Weights and Dimensions		Supply Connections	
Unit Height (External) mm	815	Requires Installation	Yes
Unit Width (External) mm	897	Requires Electrical Supply	Yes
Unit Depth (External) mm	831	UK 3 Pin Plug	Yes
Height (Internal) mm	525	Requires Hardwiring	No
Width (Internal) mm	460	Electrical Supply Rating Watts	1,000
Depth (Internal) mm	690	Single Phase Amps	8.5
Net Weight Kg	135	Single Phase Voltage	230
		Gas Connection BSP	3/4"
		Gas Pressure Propane mbar	30-50
		Total heat input at full rate Propane kW	13
		Total heat input at full rate Propane BTU per hour	50,000
		Water Connection Pressure Bar	2.5-6
		Drain Connection	DN 50 mm
		Water Connection	3/4"



Lincat Combi Ovens

Shipping

 Packed Weight Kg
 148.5

 Packed Height cm
 95

 Packed Width cm
 100

 Packed Depth cm
 120

Available Options

INSTALLATION

LCO2001 Site Survey & Installation

COMMISSIONING

LCO3001 Commissioning

R/H DOOR INSTALL

LCO2002 Right Hinged Door Installation

Available Accessories

LCA1004LLincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.06 Gas - Boiler - Left Hinged ModelLCA1004RLincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.06 Gas - Boiler - Right Hinged ModelLCA1006LLincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Boiler - Left Hinged ModelLCA1006RLincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Boiler - Right Hinged ModelLCA3003Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 20 mm deep

LCA3005

Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep

LCA3007

Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 60 mm deep

LCA3009 Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1 (325 x 530 mm)

LCA3011 Lincat Combi Oven Imperial Grilling Grid - GN1/1(325 x 530 mm)

LCA3012 Lincat Combi Oven Imperial Potato Grid - GN1/1(325 x 530 mm) - 28 Potato Capacity

LCA3013 Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1(325 x 530 mm)

Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm)

LCA3017 Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1(325 x 530 mm)

LCA3019Lincat Combi Oven Silicone Baking Mat - GN1/1(325 x 530 mm)LCA3021Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm)LCA3023Lincat Combi Oven Rack for Spare Ribs - GN1/1(325 x 530 mm)

Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity

LGA3025

Lincat Combi Oven Chicken Grid - GN1/1 (325 x 530 mm) - 8 Chicken Capacity

LCA4001 Lincat Combi Oven Software Key - Quick Select Recipes (QSR)

LCA4002 Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling

LCA5001Lincat Combi Oven Condenser Hood - for Visual Cooking 1.06/1.10/1.20 not Stacked UnitsLCA6002Lincat Combi Oven Static Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support RailsLCA6004Lincat Combi Oven Mobile Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails

LCC1001 Hydro Shield 3600 (L) Water Filter Cartridge - Recommended for CombiSlim and Visual Cooking 1.06/1.10

LCC1002 Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard

water areas

LCC1003 Hydro Shield 3600 (L) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for CombiSlim and Visual Cooking

1.06/1.10

LCC1004 Hydro Shield 6000 (XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in

hard water areas


LCC2003 Lincat Protect Intense Detergent - 2 x 5I

Available Accessories

LCC2005 Lincat Protect Cleaning Package - 6 x 5l Intense Detergent and 2 x 5l Rinse Aid

LCC2006 Lincat Protect Rinse Aid - 2 x 5l

Technical Picture

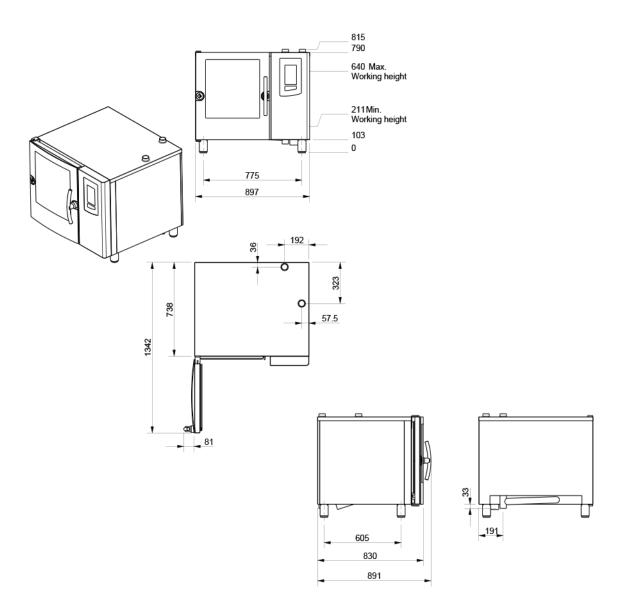



Lincat Combi Ovens



Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm