Lincat Combi Ovens

)

LC106I/P - Lincat Visual Cooking 1.06 Propane Gas Counter-top Combi Oven - Injection - W 897 mm - 13.0 kW[Gas]+1.0 kW[Electric]

- Intuitive touch display SmartTouch[®] for programming
- Immediate production of steam with injection steam production
- CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- Ability to create cooking programmes with up 15 steps

Choose Visual Cooking where high output and precise control are required.

- Rack timer allowing accurate cooking times for different items on different shelves
- ⊘ 6 x GN1/1 capacity
- Ideal for menus which require a lower volume of steaming
- Two-step safety handle

Specifications

Summary		Power and Performance	
Brand Range	Lincat Lincat Combi Ovens	Total Power kW Temperature Range °C	1 30-300
Series Power Type	Visual Cooking Gas	IP Rating Temperature Control	IPX5 Electronic
Gas Type Unit Type	Propane Gas Counter-top	Oven Rating kW	Steam connection = N/A;Hot air connection = 13.0
Available in UK Only UK Warranty GTIN	Yes 2 Years Parts and Labour Warranty 5056105120261		
Key Specifications		Capacity	
WRAS Approved Type of Lighting Number of Grids included	Yes Halogen O	Gastronorm Capacity Portions per Day	6 × GN1/1 90
Weights and Dimensions		Supply Connections	
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Net Weight Kg	815 897 831 525 460 690 135	Requires Installation Requires Electrical Supply UK 3 Pin Plug Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps Single Phase Voltage Gas Connection BSP Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane BTU per hour Water Connection Pressure Bar	Yes Yes No 1,000 8.5 230 3/4" 30-50 13 50,000 2.5-6
		Water Connection Pressure Bar Drain Connection Water Connection	2:5-6 DN 50 mm 3/4"



Lincat Combi Ovens

Shipping

Packed Weight Kg	148.5
Packed Height cm	95
Packed Width cm	100
Packed Depth cm	120

Available Options			
INSTALLATION			
LCO2001	Site Survey & Installation		
COMMISSIONING			
LCO3001	Commissioning		
R/H DOOR INSTALL			
LCO2002	Right Hinged Door Installation		
Available Accesso	bries		
LCA1003L	Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.06 Gas - Injection - Left Hinged Model		
LCA1003R	Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.06 Gas - Injection - Right Hinged Model		
LCA1005L	Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Injection - Left Hinged Model		
LCA1005R	Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Injection - Right Hinged Model		
LCA3003	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 20 mm deep		
LCA3005	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep		
LCA3007	Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 60 mm deep		
LCA3009	Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1 (325 x 530 mm)		
LCA3011	Lincat Combi Oven Imperial Grilling Grid - GN1/1(325 x 530 mm)		
LCA3012	Lincat Combi Oven Imperial Potato Grid - GN1/1 (325 x 530 mm) - 28 Potato Capacity		
LCA3013	Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1 (325 x 530 mm)		
LCA3015	Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm)		
LCA3017	Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1(325 x 530 mm)		
LCA3019	Lincat Combi Oven Silicone Baking Mat - GN1/1 (325 x 530 mm)		
LCA3021	Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm)		
LCA3023	Lincat Combi Oven Rack for Spare Ribs - GN1/1 (325 x 530 mm)		
LCA3024	Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity		
LCA3025	Lincat Combi Oven Chicken Grid - GN1/1 (325 x 530 mm) - 8 Chicken Capacity		
LCA4001	Lincat Combi Oven Software Key - Quick Select Recipes (QSR)		
LCA4002	Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling		
LCA5001	Lincat Combi Oven Condenser Hood - for Visual Cooking 1.06/1.10/1.20 not Stacked Units		
LCA6002	Lincat Combi Oven Static Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails		
LCA6004	Lincat Combi Oven Mobile Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails		
LCC1001	Hydro Shield 3600 (L) Water Filter Cartridge - Recommended for CombiSlim and Visual Cooking 1.06/1.10		
LCC1002	Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard water areas		

 Water areas

 LCC1003

 Hydro Shield 3600 (L) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for CombiSlim and Visual Cooking

1.06/1.10

Hydro Shield 6000 (XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in hard water areas

Lincat Protect Intense Detergent - 2 x 5I

LCC1004


LCC2003

lincat

Lincat Combi Ovens

Available Accessories	
LCC2005	Lincat Protect Cleaning Package - 6 x 5I Intense Detergent and 2 x 5I Rinse Aid
LCC2006	Lincat Protect Rinse Aid - 2 x 5l

Technical Picture

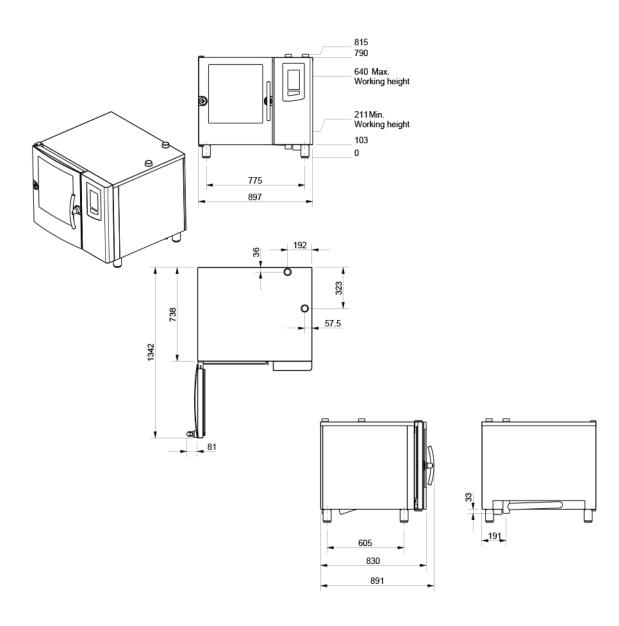

lincat

Lincat fift

Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm