



LC106I – Lincat Visual Cooking 1.06 Electric Counter-top Combi Oven – Injection – W 897 mm – 9.0 kW

Choose Visual Cooking where high output and precise control are required.

- ✓ Intuitive touch display SmartTouch® for programming
- ✓ Immediate production of steam with injection steam production
- ✓ CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- ✓ Ability to create cooking programmes with up to 15 steps
- ✓ Rack timer allowing accurate cooking times for different items on different shelves
- ✓ 6 x GN1/1 capacity
- ✓ Ideal for menus which require a lower volume of steaming
- ✓ Two-step safety handle

Specifications

Summary

| | |
|----------------------|-----------------------------------|
| Brand | Lincat |
| Range | Lincat Combi Ovens |
| Series | Visual Cooking |
| Power Type | Electric |
| Unit Type | Counter-top |
| Available in UK Only | Yes |
| UK Warranty | 2 Years Parts and Labour Warranty |
| GTIN | 5056105120247 |

Power and Performance

| | |
|----------------------|--|
| Total Power kW | 9 |
| Temperature Range °C | 30-300 |
| IP Rating | IPX5 |
| Temperature Control | Electronic |
| Oven Rating kW | Steam connection = N/A; Hot air connection = 9.0 |

Key Specifications

| | |
|--------------------------|---------|
| WRAS Approved | Yes |
| Type of Lighting | Halogen |
| Number of Grids included | 0 |

Capacity

| | |
|---------------------|-----------|
| Gastronorm Capacity | 6 x GN1/1 |
| Portions per Day | 90 |

Weights and Dimensions

| | |
|---------------------------|-----|
| Unit Height (External) mm | 815 |
| Unit Width (External) mm | 897 |
| Unit Depth (External) mm | 831 |
| Height (Internal) mm | 525 |
| Width (Internal) mm | 460 |
| Depth (Internal) mm | 690 |
| Net Weight Kg | 130 |

Supply Connections

| | |
|--------------------------------|---------------------------|
| Requires Installation | Yes |
| Requires Electrical Supply | Yes |
| UK 3 Pin Plug | No |
| Requires Hardwiring | Yes |
| Electrical Supply Rating Watts | 9,000 |
| Three Phase Amps | L1=13.0; L2=13.0; L3=13.0 |
| Three Phase Voltage | 400 |
| Water Connection Pressure Bar | 2.5-6 |
| Drain Connection | DN 50 mm |
| Water Connection | 3/4" |

Shipping

| | |
|------------------|-----|
| Packed Weight Kg | 143 |
| Packed Height cm | 95 |
| Packed Width cm | 100 |
| Packed Depth cm | 120 |

Available Options

INSTALLATION

LCO2001 Site Survey & Installation

COMMISSIONING

LCO3001 Commissioning


R/H DOOR INSTALL

LCO2002 Right Hinged Door Installation

Available Accessories

| | |
|-----------------|---|
| LCA1001L | Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.06 Electric - Standard Left Hinged Model |
| LCA1001R | Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.06 Electric - Right Hinged Model |
| LCA1002L | Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Electric - Standard Left Hinged Model |
| LCA1002R | Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Electric - Right Hinged Model |
| LCA3003 | Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 20 mm deep |
| LCA3005 | Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep |
| LCA3007 | Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 60 mm deep |
| LCA3009 | Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1(325 x 530 mm) |
| LCA3011 | Lincat Combi Oven Imperial Grilling Grid - GN1/1(325 x 530 mm) |
| LCA3012 | Lincat Combi Oven Imperial Potato Grid - GN1/1(325 x 530 mm) - 28 Potato Capacity |
| LCA3013 | Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1(325 x 530 mm) |
| LCA3015 | Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm) |
| LCA3017 | Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1(325 x 530 mm) |
| LCA3019 | Lincat Combi Oven Silicone Baking Mat - GN1/1(325 x 530 mm) |
| LCA3021 | Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm) |
| LCA3023 | Lincat Combi Oven Rack for Spare Ribs - GN1/1(325 x 530 mm) |
| LCA3024 | Lincat Combi Oven Chicken Grid - GN1/2(325 x 265 mm) - 4 Chicken Capacity |
| LCA3025 | Lincat Combi Oven Chicken Grid - GN1/1(325 x 530 mm) - 8 Chicken Capacity |
| LCA4001 | Lincat Combi Oven Software Key - Quick Select Recipes (QSR) |
| LCA4002 | Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling |
| LCA5001 | Lincat Combi Oven Condenser Hood - for Visual Cooking 1.06/1.10/1.20 not Stacked Units |
| LCA6002 | Lincat Combi Oven Static Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails |
| LCA6004 | Lincat Combi Oven Mobile Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails |
| LCC1001 | Hydro Shield 3600(L) Water Filter Cartridge - Recommended for CombiSlim and Visual Cooking 1.06/1.10 |
| LCC1002 | Hydro Shield 6000(XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard water areas |
| LCC1003 | Hydro Shield 3600(L) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for CombiSlim and Visual Cooking 1.06/1.10 |
| LCC1004 | Hydro Shield 6000(XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in hard water areas |
| LCC2003 | Lincat Protect Intense Detergent - 2 x 5l |
| LCC2005 | Lincat Protect Cleaning Package - 6 x 5l Intense Detergent and 2 x 5l Rinse Aid |
| LCC2006 | Lincat Protect Rinse Aid - 2 x 5l |

Technical Picture

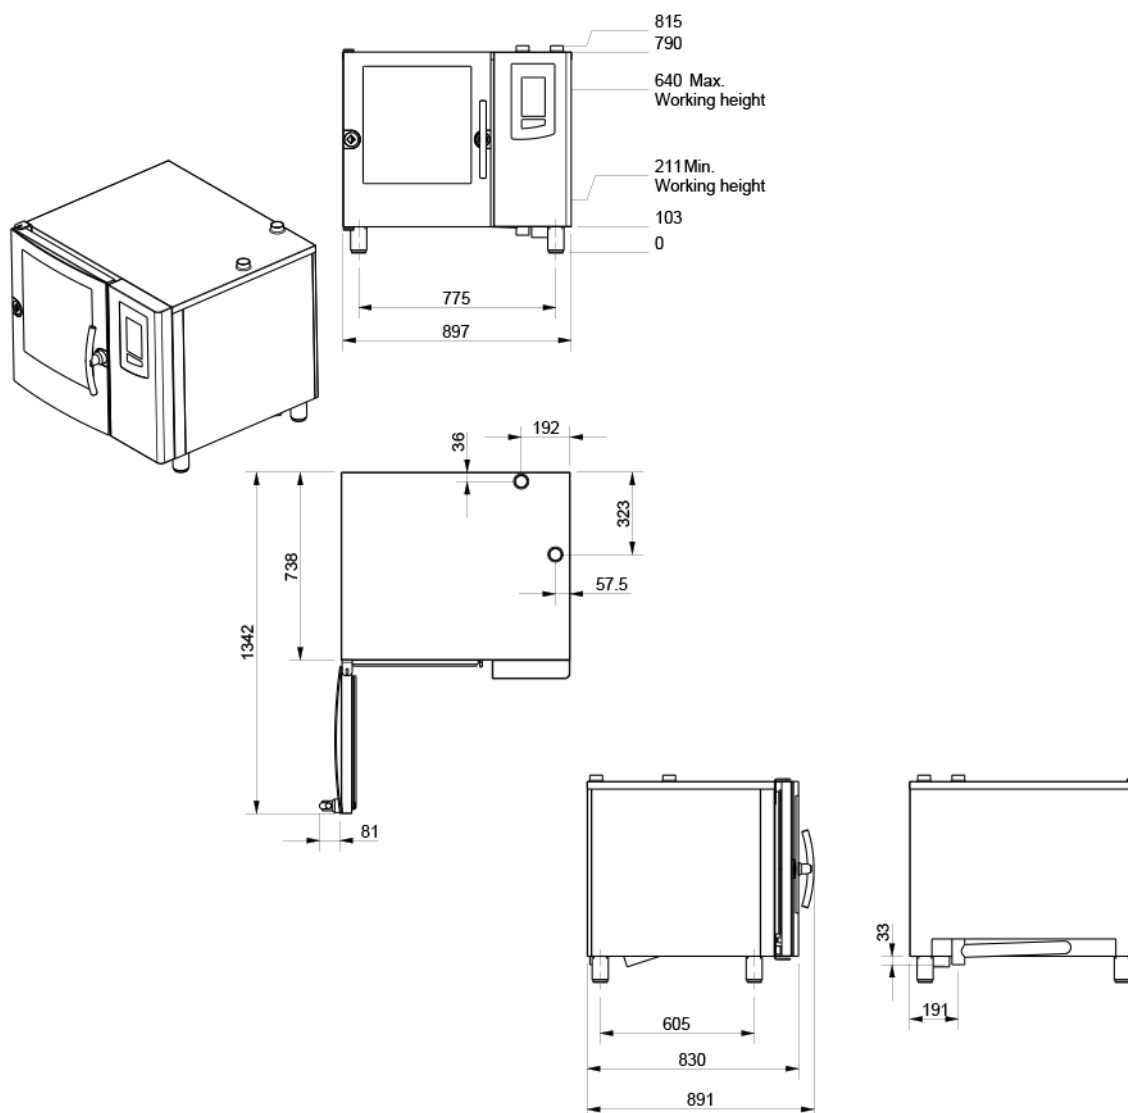

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm