Lincat Combi Ovens



LC110I/N - Lincat Visual Cooking 1.10 Natural Gas Counter-top Combi Oven - Injection - W 897 mm - 21.0 kW [Gas] + 1.0 kW [Electric] Choose Visual Cooking where high output and precise control are required.

- Intuitive touch display SmartTouch® for programming
- Immediate production of steam with injection steam production
- CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- Ability to create cooking programmes with up 15 steps
- Rack timer allowing accurate cooking times for different items on different shelves
- 10 x GN1/1 capacity
- Ideal for menus which require a lower volume of steaming
- Two-step safety handle

Specifications

Summary		Power and Performance	
Brand	Lincat	BTU per Hour	80,000
Range	Lincat Combi Ovens	Total Power kW	1
Series	Visual Cooking	Temperature Range °C	30-300
Power Type	Gas	IP Rating	IPX5
Gas Type	Natural Gas	Temperature Control	Electronic
Unit Type	Counter-top	Oven Rating kW	Steam connection = N/A;Hot air
Available in UK Only	Yes	Oven Ruting KW	connection = 21.0
UK Warranty	2 Years Parts and Labour Warranty		
GTIN	5056105120322		
Key Specifications		Capacity	
WRAS Approved	Yes	Gastronorm Capacity	10 x GN1/1
Type of Lighting	Halogen	Portions per Day	150
Number of Grids included	0		
Weights and Dimensions		Supply Connections	
Unit Height (External) mm	1075	Requires Installation	Yes
Unit Width (External) mm	897	Requires Electrical Supply	Yes
Unit Depth (External) mm	831	UK 3 Pin Plug	Yes
Height (Internal) mm	785	Requires Hardwiring	No
Width (Internal) mm	460	Electrical Supply Rating Watts	1,000
Depth (Internal) mm	690	Single Phase Amps	8.5
Net Weight Kg	175	Single Phase Voltage	230
		Gas Connection BSP	3/4"
		Gas Pressure Natural mbar	18-25
		Total heat input at full rate Natural kW	21
		Total heat input at full rate Natural BTU per hour	80,000
		Water Connection Pressure Bar	2.5-6
		Drain Connection	DN 50 mm
		Diam Connection	DIV 30 IIIIII



Lincat Combi Ovens

Shipping

Packed Weight Kg 192 5 Packed Height cm 121 Packed Width cm Packed Depth cm

Available Options

INSTALLATION

LCO2001 Site Survey & Installation

COMMISSIONING

LCO3001 Commissionina

R/H DOOR INSTALL

LCO2002 Right Hinged Door Installation

Available Accessories

LCA1005L Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Injection - Left Hinged Model LCA1005R Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Gas - Injection - Right Hinged Model

LCA3003 Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 20 mm deep LCA3005 Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep LCA3007 Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 60 mm deep

LCA3009 Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1 (325 x 530 mm)

LCA3011 Lincat Combi Oven Imperial Grilling Grid - GN1/1(325 x 530 mm)

LCA3012 Lincat Combi Oven Imperial Potato Grid - GN1/1 (325 x 530 mm) - 28 Potato Capacity

LCA3013 Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1 (325 x 530 mm) LCA3015 Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm)

LCA3017 Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1(325 x 530 mm)

LCA3019 Lincat Combi Oven Silicone Baking Mat - GN1/1 (325 x 530 mm) LCA3021 Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm) LCA3023 Lincat Combi Oven Rack for Spare Ribs - GN1/1 (325 x 530 mm)

LCA3024 Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity LCA3025 Lincat Combi Oven Chicken Grid - GN1/1 (325 x 530 mm) - 8 Chicken Capacity

LCA4001 Lincat Combi Oven Software Key - Quick Select Recipes (QSR)

LCA4002 Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling LCA5001 Lincat Combi Oven Condenser Hood - for Visual Cooking 1.06/1.10/1.20 not Stacked Units LCA6002 Lincat Combi Oven Static Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails

LCA6004

LCC1001 Hydro Shield 3600 (L) Water Filter Cartridge - Recommended for CombiSlim and Visual Cooking 1.06/1.10

Lincat Combi Oven Mobile Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails

Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard LCC1002

water areas

Hydro Shield 3600 (L) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for CombiSlim and Visual Cooking LCC1003

Hydro Shield 6000 (XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in LCC1004


hard water areas

LCC2003 Lincat Protect Intense Detergent - 2 x 5I

LCC2005 Lincat Protect Cleaning Package - 6 x 5l Intense Detergent and 2 x 5l Rinse Aid

LCC2006 Lincat Protect Rinse Aid - 2 x 5I

Technical Picture

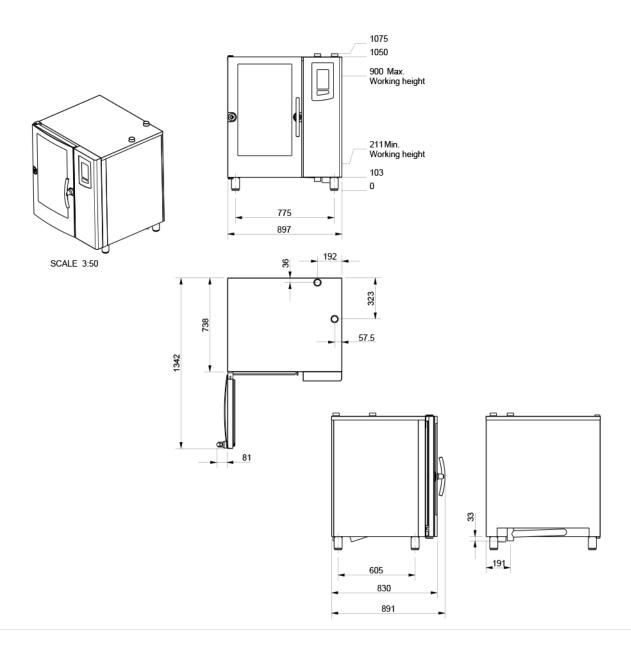



Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm

