# **Lincat** Combi Ovens



LC110I - Lincat Visual Cooking 1.10 Electric Counter-top Combi Oven - Injection - W 897 mm - 18.0 kW

Choose Visual Cooking where high output and precise control are required.

- Intuitive touch display SmartTouch® for programming
- Immediate production of steam with injection steam production
- CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- Ability to create cooking programmes with up 15 steps
- Rack timer allowing accurate cooking times for different items on different shelves
- 10 x GN1/1 capacity
- Ideal for menus which require a lower volume of steaming
- Two-step safety handle

| 5 | pe | CIT | Ica | τιο | ns |
|---|----|-----|-----|-----|----|
|   |    |     |     |     |    |

| Summary                   |                                   | Power and Performance                 |                                |
|---------------------------|-----------------------------------|---------------------------------------|--------------------------------|
| Brand                     | Lincat                            | Total Power kW                        | 18                             |
| Range                     | Lincat Combi Ovens                | Temperature Range °C                  | 30-300                         |
| Series                    | Visual Cooking                    | IP Rating                             | IPX5                           |
| Power Type                | Electric                          | Temperature Control                   | Electronic                     |
| Unit Type                 | Counter-top                       | ·                                     | Steam connection = N/A:Hot air |
| Available in UK Only      | Yes                               | Oven Rating kW                        | connection = 18.0              |
| UK Warranty               | 2 Years Parts and Labour Warranty |                                       |                                |
| GTIN                      | 5056105120315                     |                                       |                                |
| Key Specifications        |                                   | Capacity                              |                                |
| WRAS Approved             | Yes                               | Gastronorm Capacity                   | 10 x GN1/1                     |
| Type of Lighting          | Halogen                           | Portions per Day                      | 150                            |
| Number of Grids included  | 0                                 |                                       |                                |
| Weights and Dimensions    |                                   | Supply Connections                    |                                |
| Unit Height (External) mm | 1075                              | Requires Installation                 | Yes                            |
| Unit Width (External) mm  | 897                               | Requires Electrical Supply            | Yes                            |
| Unit Depth (External) mm  | 831                               | UK 3 Pin Plug                         | No                             |
| Height (Internal) mm      | 785                               | Requires Hardwiring                   | Yes                            |
| Vidth (Internal) mm       | 460                               | <b>Electrical Supply Rating Watts</b> | 18,000                         |
| Depth (Internal) mm       | 690                               | Three Phase Amps                      | L1=26.0; L2=26.0; L3=26.0      |
| Net Weight Kg             | 170                               | Three Phase Voltage                   | 400                            |
|                           |                                   | Water Connection Pressure Bar         | 2.5-6                          |
|                           |                                   | Drain Connection                      | DN 50 mm                       |
|                           |                                   | Water Connection                      | 3/4"                           |
| Shipping                  |                                   |                                       |                                |
| Packed Weight Kg          | 187                               |                                       |                                |
| Packed Height cm          | 121                               |                                       |                                |
| Packed Width cm           | 100                               |                                       |                                |
| Packed Depth cm           | 120                               |                                       |                                |



### **Lincat** Combi Ovens

**Available Options** 

INSTALLATION

LCO2001 Site Survey & Installation

COMMISSIONING

LCO3001 Commissioning

R/H DOOR INSTALL

LCA3019

LCO2002 Right Hinged Door Installation

#### **Available Accessories**

Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Electric - Standard Left Hinged LCA1002L

LCA1002R Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for Visual Cooking 1.06 on 1.10 Electric - Right Hinged Model

LCA3003 Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 20 mm deep LCA3005 Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep LCA3007 Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 60 mm deep

LCA3009 Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1(325 x 530 mm)

Lincat Combi Oven Imperial Grilling Grid - GN1/1(325 x 530 mm) LCA3011

LCA3012 Lincat Combi Oven Imperial Potato Grid - GN1/1(325 x 530 mm) - 28 Potato Capacity

LCA3013 Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1(325 x 530 mm) LCA3015 Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm)

LCA3017 Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1(325 x 530 mm)

Lincat Combi Oven Silicone Baking Mat - GN1/1(325 x 530 mm) LCA3021 Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm) LCA3023 Lincat Combi Oven Rack for Spare Ribs - GN1/1 (325 x 530 mm)

LCA3024 Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity LCA3025 Lincat Combi Oven Chicken Grid - GN1/1 (325 x 530 mm) - 8 Chicken Capacity

LCA4001 Lincat Combi Oven Software Key - Quick Select Recipes (QSR)

LCA4002 Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling LCA5001 Lincat Combi Oven Condenser Hood - for Visual Cooking 1.06/1.10/1.20 not Stacked Units LCA6002 Lincat Combi Oven Static Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails

LCA6004 Lincat Combi Oven Mobile Stand for Visual Cooking 1.06/1.10 - 8 Pairs of Support Rails

LCC1001 Hydro Shield 3600 (L) Water Filter Cartridge - Recommended for CombiSlim and Visual Cooking 1.06/1.10

Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard LCC1002

Hydro Shield 3600 (L) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for CombiSlim and Visual Cooking LCC1003

1.06/1.10

Hydro Shield 6000 (XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in LCC1004

hard water areas

LCC2003 Lincat Protect Intense Detergent - 2 x 5I


LCC2005 Lincat Protect Cleaning Package - 6 x 5l Intense Detergent and 2 x 5l Rinse Aid

LCC2006 Lincat Protect Rinse Aid - 2 x 5I

### **Technical Picture**



# **Lincat** Combi Ovens

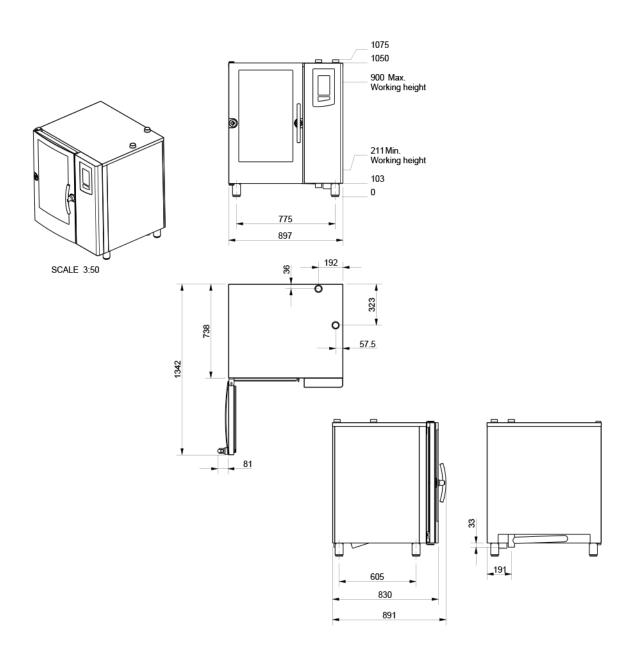



### **Lincat Limited**

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

**Company No:** 2175448

A member company of

### **Customer Care**

**Tel:** +44 1522 875500

Email: care@lincat.co.uk

### **Export Customers**

**Tel:** +44 1522 875536

Email: export@lincat.co.uk

### **Opening Hours**

Monday - Friday:

8.30am - 5pm