# Lincat Combi Ovens



LC120B - Lincat Visual Cooking 1.20 Electric Free-standing Combi Oven - Boiler - W 899 mm - 36.0 kW

- Intuitive touch display SmartTouch<sup>®</sup> for programming
- Immediate production of steam with injection steam production
- CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- Ability to create cooking programmes with up 15 steps

Choose Visual Cooking where high output and precise control are required.

- Rack timer allowing accurate cooking times for different items on different shelves
- 20 x GN1/1 capacity
- Ideal for menus which require a high volume of steaming
- Two-step safety handle

## **Specifications**

Summary		Power and Performance	
Brand	Lincat	Total Power kW	36
Range	Lincat Combi Ovens	Temperature Range °C	30-300
Series	Visual Cooking	IP Rating	IPX5
Power Type	Electric	Temperature Control	Electronic
Unit Type	Free-standing	Oven Rating kW	Steam connection = 36.0;Hot air
Available in UK Only	Yes		connection = 36.0
UK Warranty	2 Years Parts and Labour Warranty		
GTIN	5056105120346		
Key Specifications		Capacity	
WRAS Approved	Yes	Gastronorm Capacity	20 x GN1/1
Type of Lighting	Halogen	Portions per Day	300
Number of Grids included	0		
Weights and Dimensions		Supply Connections	
Unit Height (External) mm	1877	Requires Installation	Yes
Unit Width (External) mm	899	<b>Requires Electrical Supply</b>	Yes
Unit Depth (External) mm	831	UK 3 Pin Plug	No
Height (Internal) mm	1,435	Requires Hardwiring	Yes
Width (Internal) mm	460	Electrical Supply Rating Watts	36,000
Depth (Internal) mm	690	Three Phase Amps	L1=52.0; L2=52.0; L3=52.0
Net Weight Kg	300	Three Phase Voltage	400
		Water Connection Pressure Bar	2.5-6
		Drain Connection	DN 50 mm
		Water Connection	3/4"


### Shipping

Packed Weight Kg	330
Packed Height cm	205
Packed Width cm	100
Packed Depth cm	120

Available Options				
INSTALLATION				
LCO2001	Site Survey & Installation			
COMMISSIONING				
LCO3001	Commissioning			
R/H DOOR INSTALL				
LCO2002	Right Hinged Door Installation			
Available Accessories				
LCA2003	Lincat Combi Oven Roll-in Trolley - for Visual Cooking 1.20 - Including 65 mm Rack			
LCA3003	Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 20 mm deep			
LCA3005	Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 40 mm deep			
LCA3007	Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 60 mm deep			
LCA3009	Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1(325 x 530 mm)			
LCA3011	Lincat Combi Oven Imperial Grilling Grid - GN1/1 (325 x 530 mm)			
LCA3012	Lincat Combi Oven Imperial Potato Grid - GN1/1 (325 x 530 mm) - 28 Potato Capacity			
LCA3013	Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1 (325 x 530 mm)			
LCA3015	Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm)			
LCA3017	Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1 (325 x 530 mm)			
LCA3019	Lincat Combi Oven Silicone Baking Mat - GN1/1 (325 x 530 mm)			
LCA3021	Lincat Combi Oven Steamfry Basket - GN1/1 (325 x 530 mm)			
LCA3023	Lincat Combi Oven Rack for Spare Ribs - GN1/1(325 x 530 mm)			
LCA3024	Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity			
LCA3025	Lincat Combi Oven Chicken Grid - GN1/1(325 x 530 mm) - 8 Chicken Capacity			
LCA4001	Lincat Combi Oven Software Key - Quick Select Recipes (QSR)			
LCA4002	Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling			
LCA5001	Lincat Combi Oven Condenser Hood - for Visual Cooking 1.06/1.10/1.20 not Stacked Units			
LCA7001	Lincat Combi Oven Roll-in Plate Rack - for Visual Cooking 1.20 - 48 Plate Capacity			
LCA7002	Lincat Combi Oven Roll-in Plate Rack - for Visual Cooking 1.20 - 57 Plate Capacity			
LCA7005	Thermal Blanket for Roll-in Trolley for Visual Cooking 1.20			
LCC1002	Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard water areas			
LCC1004	Hydro Shield 6000 (XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in hard water areas			
LCC2003	Lincat Protect Intense Detergent - 2 x 5I			
LCC2005	Lincat Protect Cleaning Package - 6 x 5I Intense Detergent and 2 x 5I Rinse Aid			
LCC2006	Lincat Protect Rinse Aid - 2 x 5			

## **Technical Picture**

# Lincat Combi Ovens

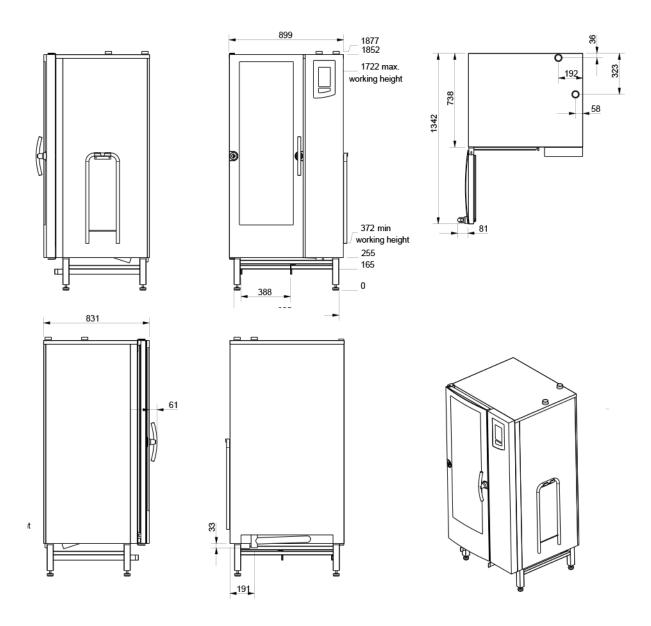

# Lincat fift

### Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

#### **Export Customers**

Tel: +44 1522 875536

Email: export@lincat.co.uk

### **Opening Hours**

Monday – Friday: 8.30am – 5pm