Lincat Combi Ovens



LC120I/N - Lincat Visual Cooking 1.20 Natural Gas Free-standing Combi Oven - Injection - W 899 mm - 42.0 kW[Gas]+ 2.0 kW[Electric]

- Intuitive touch display SmartTouch[®] for programming
- Immediate production of steam with injection steam production
- CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- Ability to create cooking programmes with up 15 steps

Choose Visual Cooking where high output and precise control are required.

- Rack timer allowing accurate cooking times for different items on different shelves
- 20 x GN1/1 capacity
- Ideal for menus which require a lower volume of steaming
- Two-step safety handle

Specifications

Summary		Power and Performance	
Brand	Lincat	BTU per Hour	160,000
Range	Lincat Combi Ovens	Total Power kW	2
Series	Visual Cooking	Temperature Range °C	30-300
Power Type	Gas	IP Rating	IPX5
Gas Type	Natural Gas	Temperature Control	Electronic
Unit Type	Free-standing	Oven Rating kW	Steam connection = N/A;Hot air
Available in UK Only	Yes		connection = 42.0
UK Warranty	2 Years Parts and Labour Warranty		
GTIN	5056105120384		
Key Specifications		Capacity	
WRAS Approved	Yes	Gastronorm Capacity	20 x GN1/1
Type of Lighting	Halogen	Portions per Day	300
Number of Grids included	0		
Weights and Dimensions		Supply Connections	
Unit Height (External) mm	1877	Requires Installation	Yes
Unit Width (External) mm	899	Requires Electrical Supply	Yes
Unit Depth (External) mm	831	UK 3 Pin Plug	Yes
Height (Internal) mm	1,435	Requires Hardwiring	No
Width (Internal) mm	460	Electrical Supply Rating Watts	2,000
Depth (Internal) mm	690	Single Phase Amps	17
Net Weight Kg	305	Single Phase Voltage	230
		Gas Connection BSP	3/4"
		Gas Pressure Natural mbar	18-25
		Total heat input at full rate Natural	42
		kW	
		kW Total heat input at full rate Natural BTU per hour	160,000
		Total heat input at full rate Natural	160,000 2.5-6
		Total heat input at full rate Natural BTU per hour	



Lincat Combi Ovens

Shipping


Packed Weight Kg	335.5
Packed Height cm	205
Packed Width cm	100
Packed Depth cm	120

INSTALLATION		
LCO2001	Site Survey & Installation	
COMMISSIONING		
_CO3001	Commissioning	
R/H DOOR INSTALL		
_CO2002	Right Hinged Door Installation	

Available Accessories

LCA2003	Lincat Combi Oven Roll-in Trolley - for Visual Cooking 1.20 - Including 65 mm Rack
LCA3003	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 20 mm deep
LCA3005	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep
LCA3007	Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 60 mm deep
LCA3009	Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1(325 x 530 mm)
LCA3011	Lincat Combi Oven Imperial Grilling Grid - GN1/1 (325 x 530 mm)
LCA3012	Lincat Combi Oven Imperial Potato Grid - GN1/1 (325 x 530 mm) - 28 Potato Capacity
LCA3013	Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1 (325 x 530 mm)
LCA3015	Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm)
LCA3017	Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1(325 x 530 mm)
LCA3019	Lincat Combi Oven Silicone Baking Mat - GN1/1 (325 x 530 mm)
LCA3021	Lincat Combi Oven Steamfry Basket - GN1/1 (325 x 530 mm)
LCA3023	Lincat Combi Oven Rack for Spare Ribs - GN1/1(325 x 530 mm)
LCA3024	Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity
LCA3025	Lincat Combi Oven Chicken Grid - GN1/1(325 x 530 mm) - 8 Chicken Capacity
LCA4001	Lincat Combi Oven Software Key - Quick Select Recipes (QSR)
LCA4002	Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling
LCA5001	Lincat Combi Oven Condenser Hood - for Visual Cooking 1.06/1.10/1.20 not Stacked Units
LCA7001	Lincat Combi Oven Roll-in Plate Rack - for Visual Cooking 1.20 - 48 Plate Capacity
LCA7002	Lincat Combi Oven Roll-in Plate Rack - for Visual Cooking 1.20 - 57 Plate Capacity
LCA7005	Thermal Blanket for Roll-in Trolley for Visual Cooking 1.20
LCC1002	Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard water areas
LCC1004	Hydro Shield 6000 (XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in hard water areas
LCC2003	Lincat Protect Intense Detergent - 2 x 5I
LCC2005	Lincat Protect Cleaning Package - 6 x 5I Intense Detergent and 2 x 5I Rinse Aid
LCC2006	Lincat Protect Rinse Aid - 2 x 5l

Technical Picture

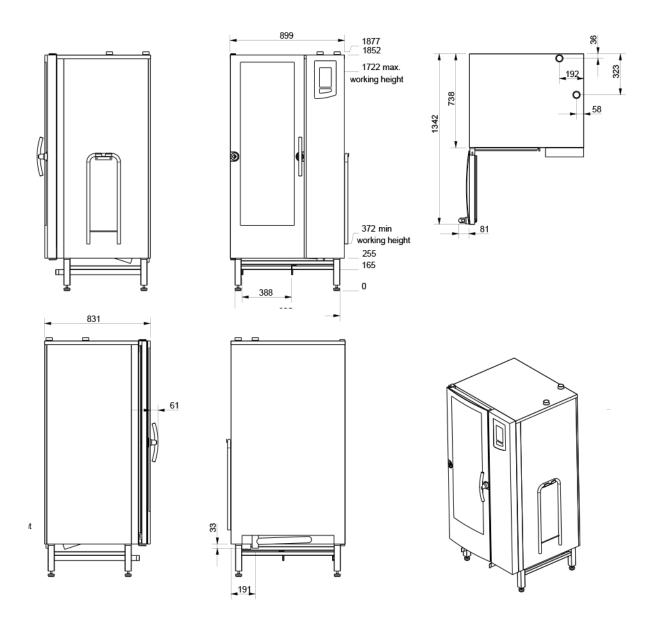

Lincat frifri

Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm