### lincat

## Lincat Combi Ovens



LC220B/P - Lincat Visual Cooking 2.20 Propane Gas Free-standing Combi Oven - Boiler - W 1122 mm - 48.0 kW[Gas] + 2.0 kW[Electric]

- Intuitive touch display SmartTouch<sup>®</sup> for programming
- Efficient, controlled production and injection of steam, with hybrid boiler and injection steam production
- CombiSmart® 10-step humidity control, and ClimaOptima® automatic humidity control functions
- Ability to create cooking programmes with up 15 steps

Choose Visual Cooking where high output and precise control are required.

- Rack timer allowing accurate cooking times for different items on different shelves
- 20 x GN2/1 capacity
- Ideal for menus which require a high volume of steaming
- Two-step safety handle

#### **Specifications**

Summary		Power and Performance	
Brand	Lincat	Total Power kW	2
Range	Lincat Combi Ovens	Temperature Range °C	30-300
Series	Visual Cooking	IP Rating	IPX5
Power Type	Gas	Temperature Control	Electronic
Gas Type	Propane Gas	Over Define IN	Steam connection = 42.0;Hot air
Jnit Type	Free-standing	Oven Rating kW	connection = 48.0
Available in UK Only	Yes		
JK Warranty	2 Years Parts and Labour Warranty		
GTIN	5056105120544		
Key Specifications		Capacity	
WRAS Approved	Yes	Gastronorm Capacity	20 x GN2/1
Гуре of Lighting	Halogen	Portions per Day	600
lumber of Grids included	0		
Weights and Dimensions		Supply Connections	
Jnit Height (External) mm	1877	Requires Installation	Yes
Jnit Width (External) mm	1122	Requires Electrical Supply	Yes
mit math (External) min			
	951	UK 3 Pin Plug	Yes
Init Depth (External) mm	951 1,435	UK 3 Pin Plug Requires Hardwiring	Yes No
Jnit Depth (External) mm leight (Internal) mm		•	
Jnit Depth (External) mm leight (Internal) mm Vidth (Internal) mm	1,435	Requires Hardwiring	No
Jnit Width (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Net Weight Kg	1,435 620	Requires Hardwiring Electrical Supply Rating Watts	No 2,000
Jnit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm	1,435 620 795	Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps	No 2,000 17
Init Depth (External) mm leight (Internal) mm Vidth (Internal) mm Depth (Internal) mm	1,435 620 795	Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps Single Phase Voltage	No 2,000 17 230
nit Depth (External) mm eight (Internal) mm /idth (Internal) mm epth (Internal) mm	1,435 620 795	Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps Single Phase Voltage Gas Connection BSP	No 2,000 17 230 3/4"
Jnit Depth (External) mm leight (Internal) mm Vidth (Internal) mm Depth (Internal) mm	1,435 620 795	Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps Single Phase Voltage Gas Connection BSP Gas Pressure Propane mbar Total heat input at full rate Propane	No 2,000 17 230 3/4* 30-50
Jnit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm	1,435 620 795	Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps Single Phase Voltage Gas Connection BSP Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 2,000 17 230 3/4* 30–50 48
Jnit Depth (External) mm leight (Internal) mm Vidth (Internal) mm Depth (Internal) mm	1,435 620 795	Requires Hardwiring Electrical Supply Rating Watts Single Phase Amps Single Phase Voltage Gas Connection BSP Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane BTU per hour	No 2,000 17 230 3/4" 30-50 48 180,000



### Lincat Combi Ovens


#### Shipping Packed Weight Kg 423.5 Packed Height cm 205 Packed Width cm 110 Packed Depth cm 125

INSTALLATION		
LCO2001	Site Survey & Installation	
COMMISSIONING		
LCO3001	Commissioning	
R/H DOOR INSTALL		
LCO2002	Right Hinged Door Installation	

LCA2004	Lincat Combi Oven Roll-in Trolley - for Visual Cooking 2.20 - Including 67 mm Rack
LCA3003	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 20 mm deep
LCA3005	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 40 mm deep
LCA3007	Lincat Combi Oven Imperial Non-stick Container - GN1/1(325 x 530 mm) - 60 mm deep
LCA3009	Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1(325 x 530 mm)
LCA3011	Lincat Combi Oven Imperial Grilling Grid - GN1/1 (325 x 530 mm)
LCA3012	Lincat Combi Oven Imperial Potato Grid - GN1/1 (325 x 530 mm) - 28 Potato Capacity
LCA3013	Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1 (325 x 530 mm)
LCA3015	Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1 (325 x 530 mm)
LCA3021	Lincat Combi Oven Steamfry Basket - GN1/1 (325 x 530 mm)
LCA3023	Lincat Combi Oven Rack for Spare Ribs - GN1/1(325 x 530 mm)
LCA3024	Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity
LCA3025	Lincat Combi Oven Chicken Grid - GN1/1(325 x 530 mm) - 8 Chicken Capacity
LCA4001	Lincat Combi Oven Software Key - Quick Select Recipes (QSR)
LCA4002	Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling
LCA5002	Lincat Combi Oven Condenser Hood - for Visual Cooking 2.06/2.10/2.20 not Stacked Units
LCA7003	Lincat Combi Oven Roll-in Plate Rack - for Visual Cooking 2.20 - 99 Plate Capacity
LCA7004	Lincat Combi Oven Roll-in Plate Rack - for Visual Cooking 2.20 - 117 Plate Capacity
LCA7006	Thermal Blanket for Roll-in Trolley for Visual Cooking 2.20
LCC1002	Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard water areas
LCC1004	Hydro Shield 6000 (XL) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for 1.20/2.06/2.10/2.20 + all Ovens in hard water areas
LCC2003	Lincat Protect Intense Detergent - 2 x 5I
LCC2005	Lincat Protect Cleaning Package - 6 x 5I Intense Detergent and 2 x 5I Rinse Aid
LCC2006	Lincat Protect Rinse Aid - 2 x 5l

### **Technical Picture**

### Lincat Combi Ovens

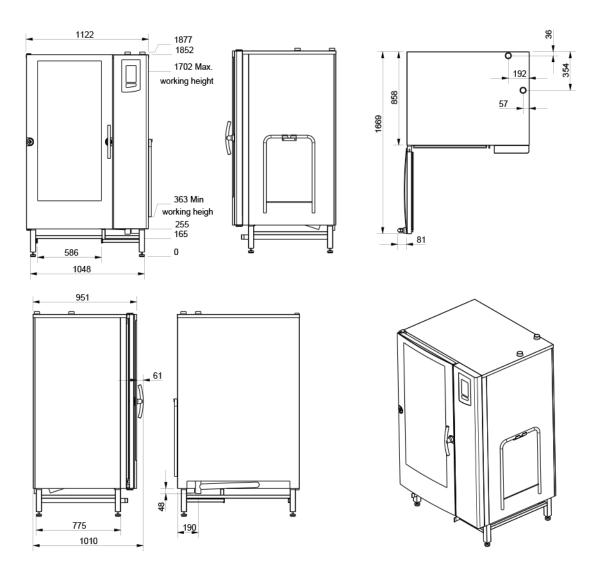

# Lincat fift

### Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



**Customer Care** 

Tel: +44 1522 875500

Email: care@lincat.co.uk

#### Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

#### **Opening Hours**

Monday – Friday: 8.30am – 5pm