

Lincat Combi Ovens



LCS106I - Lincat CombiSlim 1.06 Electric Counter-top Combi Oven - Injection - W 513 mm - 8.4 kW

Gain maximum flexibility using minimum space with CombiSlim ovens.

- Gain maximum flexibility using minimum space with CombiSlim ovens. These combi ovens measure only 51.3 cm in width and fit into all professional kitchens
- CombiSlim ovens are ideal for small-scale food production in take-away shops, cafés, etc
- Intuitive touch display SmartTouch® for programming
- 1/1GN compatible

- Steam injection, with CombiSmart® humidity
- Ability to create cooking programmes with up 15
- Rack timer allowing accurate cooking times for different items on different shelves
- Two-step safety handle

Specifications Power and Performance Summary Total Power kW **Brand** 8.4 Range Lincat Combi Ovens

Series CombiSlim **Power Type** Electric **Unit Type** Counter-top Available in UK Only

UK Warranty 2 Years Parts and Labour Warranty

GTIN 5056105120582 Temperature Range °C 30-300 **IP Rating** IPX4 **Temperature Control** Electronic Steam connection = N/A;Hot air

Oven Rating kW

connection = 8.4

| Key Specifications | | Capacity | Capacity | | |
|--------------------------|---------|---------------------|-----------|--|--|
| WRAS Approved | Yes | Gastronorm Capacity | 6 × GN1/1 | | |
| Type of Lighting | Halogen | Portions per Day | 60 | | |
| Number of Grids included | Π | | | | |

| | 0 | | |
|---------------------------|-----|---------------------------------------|---------------------------|
| Weights and Dimensions | | Supply Connections | |
| Unit Height (External) mm | 753 | Requires Installation | Yes |
| Unit Width (External) mm | 513 | Requires Electrical Supply | Yes |
| Unit Depth (External) mm | 811 | UK 3 Pin Plug | No |
| Height (Internal) mm | 350 | Requires Hardwiring | Yes |
| Width (Internal) mm | 400 | Electrical Supply Rating Watts | 8,400 |
| Depth (Internal) mm | 630 | Three Phase Amps | L1=14.0; L2=14.0; L3=14.0 |
| Net Weight Kg | 67 | Three Phase Voltage | 400 |
| | | Water Connection Pressure Bar | 2.5-6 |
| | | Drain Connection | DN 40 mm |
| | | Water Connection | 3/4" |
| | | | |



Lincat Combi Ovens

Shipping

 Packed Weight Kg
 73.7

 Packed Height cm
 80

 Packed Width cm
 60

 Packed Depth cm
 95

Available Options

INSTALLATION

LCO2001 Site Survey & Installation

COMMISSIONING

LCO3001 Commissioning

R/H DOOR INSTALL

LCC1004

LCC2003

LCC2005

LCC2006

LCO2002 Right Hinged Door Installation

in hard water areas

Lincat Protect Intense Detergent - 2 x 5I

Lincat Protect Rinse Aid - 2 x 5l


| Available Accessories | | | | |
|-----------------------|--|--|--|--|
| LCA1013LR | Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for CombiSlim 1.06 on 1.06 | | | |
| LCA1014LR | Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for CombiSlim 1.06 on 1.10 | | | |
| LCA3003 | Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 20 mm deep | | | |
| LCA3005 | Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 40 mm deep | | | |
| LCA3007 | Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 60 mm deep | | | |
| LCA3009 | Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1 (325 x 530 mm) | | | |
| LCA3011 | Lincat Combi Oven Imperial Grilling Grid - GN1/1 (325 x 530 mm) | | | |
| LCA3012 | Lincat Combi Oven Imperial Potato Grid - GN1/1(325 x 530 mm) - 28 Potato Capacity | | | |
| LCA3013 | Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1 (325 x 530 mm) | | | |
| LCA3015 | Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1(325 x 530 mm) | | | |
| LCA3017 | Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1 (325 x 530 mm) | | | |
| LCA3019 | Lincat Combi Oven Silicone Baking Mat - GN1/1(325 x 530 mm) | | | |
| LCA3021 | Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm) | | | |
| LCA3023 | Lincat Combi Oven Rack for Spare Ribs - GN1/1 (325 x 530 mm) | | | |
| LCA3024 | Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity | | | |
| LCA3025 | Lincat Combi Oven Chicken Grid - GN1/1 (325 x 530 mm) - 8 Chicken Capacity | | | |
| LCA4001 | Lincat Combi Oven Software Key - Quick Select Recipes (QSR) | | | |
| LCA4002 | Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling | | | |
| LCA5003 | Lincat Combi Oven Condenser Hood - for CombiSlim Models | | | |
| LCA6006 | Lincat Combi Oven Static Stand for CombiSlim - Open Stand | | | |
| LCC1001 | Hydro Shield 3600 (L) Water Filter Cartridge - Recommended for CombiSlim and Visual Cooking 1.06/1.10 | | | |
| LCC1002 | Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard water areas | | | |
| LCC1003 | Hydro Shield 3600 (L) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for CombiSlim and Visual Cooking 1.06/1.10 | | | |


Product Code: LCS1061 Page Number: 2 Print Date: 12/08/2021

Lincat Protect Cleaning Package – 6×5 l Intense Detergent and 2×5 l Rinse Aid

 $Hydro\ Shield\ 6000\ (XL)\ Water\ Filter\ Kit-Including\ Filter,\ Filter\ Head\ and\ Hose-Recommended\ for\ 1.20/2.06/2.10/2.20+all\ Ovens$

Technical Picture

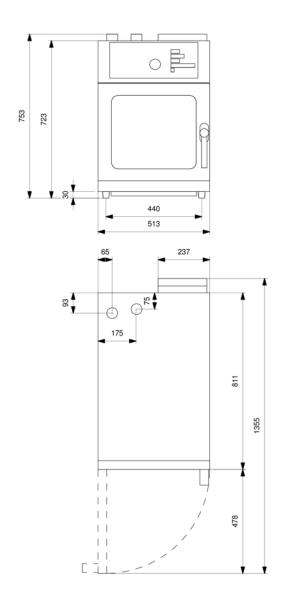

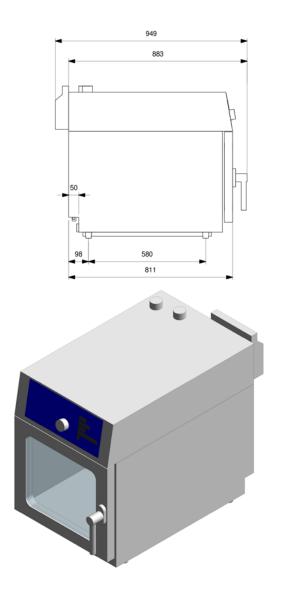



Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm