lincat

SILVERLINK 600



SLR6/P - Lincat Silverlink 600 Propane Gas Freestanding Oven Range -Legs at Rear - 4 Burners -W 600 mm - 23.8 kW

- Four powerful gas burners with flame failure device for added safety
- High power gas oven
- Fully pressed and sealed hob tops for easy cleaning

Power and Performance

Cook a variety of delicious dishes with the powerful Silverlink 600 Gas Oven Range.

- Robust, easy-to-clean vitreous enamelled cast iron pan supports
- Low level flue maximises working area and enables you to use large stock pots
- ➢ Four shelf positions with two removable shelves

Specifications

Summary

Descud		DTH as a linear	01.000
Brand	Lincat	BTU per Hour	81,206
Range	Silverlink 600	Total Power kW	23.8
Power Type	Gas	Temperature Range °C	130-250
Gas Type	Propane Gas	Temperature Control	Mechanical
Unit Type	Free-standing	Rating per Hob kW	4.5
Available in UK Only	No	Oven Rating kW	5.8
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105105176		
		_	
Key Specifications			
		_	
Number of Shelves included	2		
Number of Shelf Positions	4		
Number of Hobs	4		
Shape of Hob	Round		
Weights and Dimensions		Supply Connections	
Unit Height (External) mm	956	Requires Installation	Yes
	956 600	Requires Installation Requires Electrical Supply	Yes No
Unit Height (External) mm		Requires Installation Requires Electrical Supply Gas Connection BSP	
Unit Height (External) mm Unit Width (External) mm	600	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate	No
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm	600 600	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour	No 1/2" 1.70
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm	600 600 400	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar	No 1/2" 1.70 37
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm	600 600 400 485	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour	No 1/2" 1.70
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm	600 600 400 485 342	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 1/2" 1.70 37
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm	600 600 400 485 342 460	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW	No 1/2" 1.70 37 23.8
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm	600 600 400 485 342 460 342	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 1/2" 1.70 37 23.8
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm Hob Dimensions mm Net Weight Kg	600 600 400 485 342 460 342 W590 × D500	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 1/2" 1.70 37 23.8
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm Hob Dimensions mm	600 600 400 485 342 460 342 W590 × D500	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 1/2" 1.70 37 23.8
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm Hob Dimensions mm Net Weight Kg	600 600 400 485 342 460 342 W590 × D500	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Propane m ³ per Hour Gas Pressure Propane mbar Total heat input at full rate Propane kW Total heat input at full rate Propane	No 1/2" 1.70 37 23.8

Packed Weight Kg	74.69
Packed Height cm	110
Packed Width cm	81.3
Packed Depth cm	68.5

Available Accessories





SILVERLINK 600


SLR6/SB

SPLASHBACK SLR6

Technical Picture





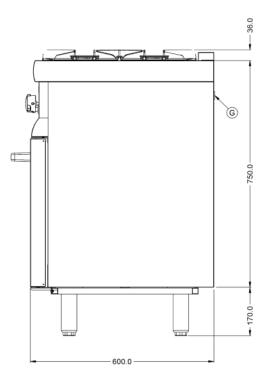



SILVERLINK 600

Lincat fift

Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am – 5pm