# SILVERLINK 600



SLR9/N - Lincat Silverlink 600 Natural Gas Freestanding Oven Range -Legs at Rear - 6 Burners -W 900 mm - 35.5 kW

- Six powerful gas burners with flame failure device for added safety
- High power gas oven with side opening doors for easy access
- Fully pressed and sealed hob tops for easy cleaning

**Power and Performance** 

Cook a variety of delicious dishes with the powerful Silverlink 600 Gas Oven Range.

- Robust, easy-to-clean vitreous enamelled cast iron pan supports
- Low level flue maximises working area and enables you to use large stock pots
- Sour shelf positions with two removable shelves

### Specifications

### Summary

Brand	Lincat	BTU per Hour	121,126
Range	Silverlink 600	Total Power kW	35.5
Power Type	Gas	Temperature Range °C	130-250
Gas Type	Natural Gas	Temperature Control	Mechanical
Unit Type	Free-standing	Rating per Hob kW	4.5
Available in UK Only	No	Oven Rating kW	8.5
UK Warranty	2 Years Parts and Labour Warranty		
Export Warranty	Contact your local dealer		
GTIN	5056105105206		
Key Specifications			
Number of Shelves included	2		
Number of Shelf Positions	4		
Number of Hobs	6		
Shape of Hob	Round		
Shape of Hob	Round		
Weights and Dimensions		Supply Connections	
Weights and Dimensions Unit Height (External) mm	956	Supply Connections Requires Installation	Yes
	956 900		Yes No
Unit Height (External) mm		Requires Installation	
Unit Height (External) mm Unit Width (External) mm	900	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural	No
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm	900 600	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural m <sup>3</sup> per Hour	No 1/2* 3.38
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm	900 600 400	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural m <sup>3</sup> per Hour Gas Pressure Natural mbar	No 1/2" 3.38 20
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm	900 600 400 725	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural m <sup>a</sup> per Hour Gas Pressure Natural mbar Total heat input at full rate Natural kW	No 1/2* 3.38
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm	900 600 400 725 342	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural m <sup>3</sup> per Hour Gas Pressure Natural mbar Total heat input at full rate Natural kW Total heat input at full rate Natural	No 1/2" 3.38 20
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm	900 600 400 725 342 700	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural m <sup>a</sup> per Hour Gas Pressure Natural mbar Total heat input at full rate Natural kW	No 1/2" 3.38 20 23.8
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm	900 600 400 725 342 700 342	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural m <sup>3</sup> per Hour Gas Pressure Natural mbar Total heat input at full rate Natural kW Total heat input at full rate Natural	No 1/2" 3.38 20 23.8
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm Hob Dimensions mm Net Weight Kg	900 600 400 725 342 700 342 W890 × D500	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural m <sup>3</sup> per Hour Gas Pressure Natural mbar Total heat input at full rate Natural kW Total heat input at full rate Natural	No 1/2" 3.38 20 23.8
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm Hob Dimensions mm	900 600 400 725 342 700 342 W890 × D500	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural m <sup>3</sup> per Hour Gas Pressure Natural mbar Total heat input at full rate Natural kW Total heat input at full rate Natural	No 1/2" 3.38 20 23.8
Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Height (Internal) mm Width (Internal) mm Depth (Internal) mm Shelf Dimensions Width mm Shelf Dimensions Depth mm Hob Dimensions mm Net Weight Kg	900 600 400 725 342 700 342 W890 × D500	Requires Installation Requires Electrical Supply Gas Connection BSP Gas Consumption at full rate Natural m <sup>3</sup> per Hour Gas Pressure Natural mbar Total heat input at full rate Natural kW Total heat input at full rate Natural	No 1/2" 3.38 20 23.8

### Available Accessories

100

81

Packed Width cm

Packed Depth cm





# **SILVERLINK 600**


SLR9/SB

SPLASHBACK SLR9/FL

### **Technical Picture**



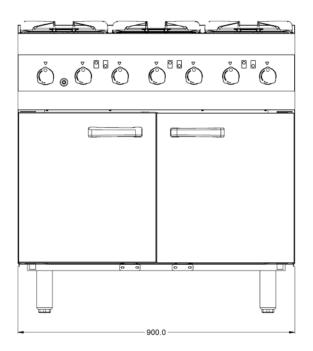

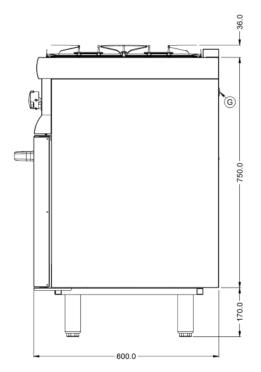



## **SILVERLINK 600**

# Lincat fift

#### Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



### Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

### Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

#### **Opening Hours**

Monday – Friday: 8.30am – 5pm