



KIBUK Serveover Counters


KIBUK100 / KIBUK150 / KIBUK200 / KIBUK250 / KIBUK300

2 Years Parts & Labour Warranty

3-4 Weeks Lead Time

UK Service Support

Manufactured In Europe

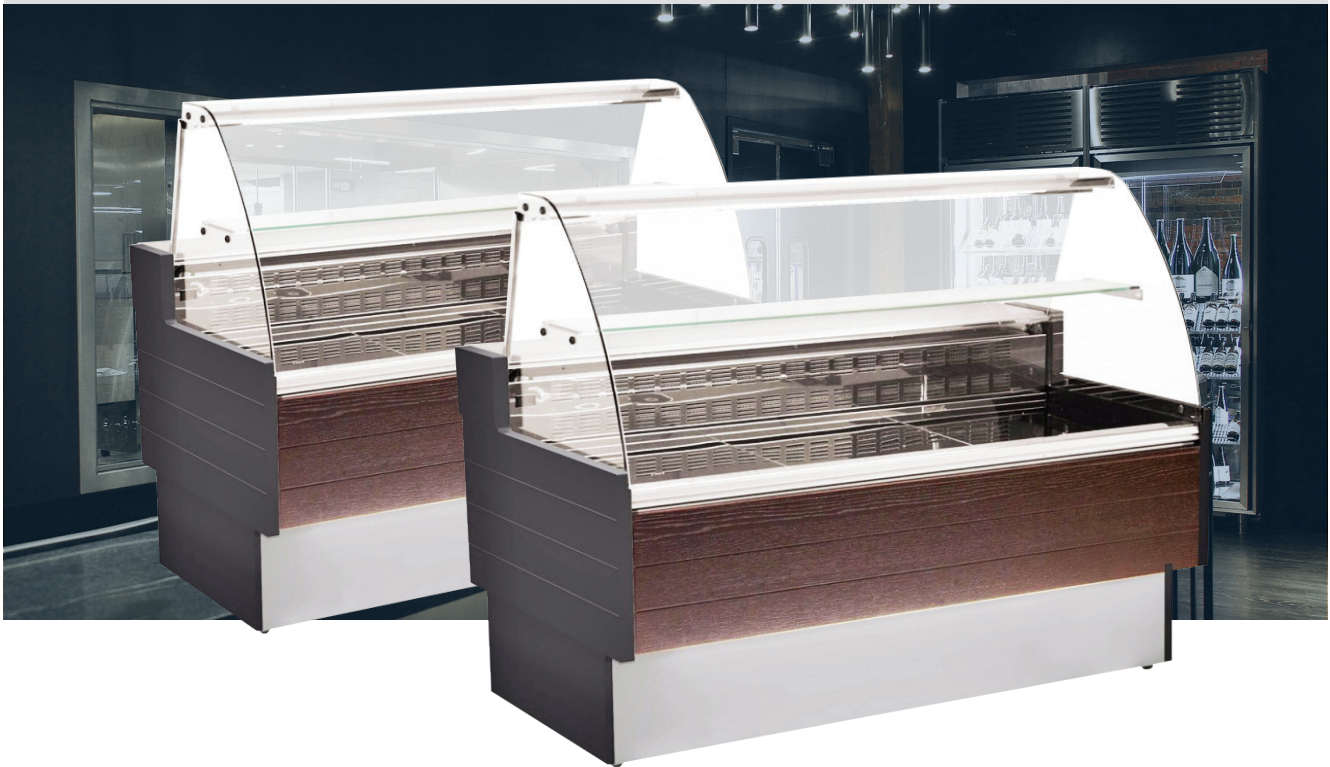

This Sterling Pro Green serveover counter range is ideal for commercial environments such as cafés, conveniences stores and restaurants. Manufactured in Europe, this range features independent refrigerated under storage, internal ambient shelf displays, LED lighting, automatic timed defrosting, Stainless Steel display decks, wooden side walls, electronic controls, curved glass and a Stainless Steel and dark brown exterior finish.

Model	Deck Area	Temperature Range	Max Ambient	Refrigerant	Dimensions (mm)		
KIBUK100	0.60m ²	+3°C to +5°C	+25°C	R455a	W1040	D900	H1262
KIBUK150	0.83m ²	+3°C to +5°C	+25°C	R455a	W1520	D900	H1262
KIBUK200	1.10m ²	+3°C to +5°C	+25°C	R455a	W2000	D900	H1262
KIBUK250	1.38m ²	+3°C to +5°C	+25°C	R455a	W2480	D900	H1262
KIBUK300	3.86m ²	+3°C to +5°C	+25°C	R455a	W2960	D900	H1262

KIBUK Serveover Counters

KIBUK100 / KIBUK150 / KIBUK200 / KIBUK250 / KIBUK300



Range Specifications

	KIBUK100	KIBUK150	KIBUK200	KIBUK250	KIBUK300
GTIN Code	5060750320327	5060750320662	5060750320334	5060750320341	5060750320358
Exterior Dimensions	W1040 x D900 x H1262	W1520 x D900 x H1262	W2000 x D900 x H1262	W2480 x D900 x H1262	W2960 x D900 x H1262
Deck Area	0.60m ²	0.83m ²	1.10m ²	1.38m ²	3.86m ²
Glass Type	Curved	Curved	Curved	Curved	Curved
Under Storage	Yes	Yes	Yes	Yes	Yes
Storage Doors	N/A	N/A	N/A	N/A	N/A
Display shelves	1	1	1	1	1
Exterior Finish	S/Steel & brown	S/Steel & brown	S/Steel & brown	S/Steel & brown	S/Steel & brown
Interior Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Temperature Range	+3°C to +5°C	+3°C to +5°C	+3°C to +5°C	+3°C to +5°C	+3°C to +5°C
Max Ambient	+25°C	+25°C	+25°C	+25°C	+25°C
Refrigerant	R455a	R455a	R455a	R455a	R455a
Energy Rating	N/A	N/A	N/A	N/A	N/A
Climate Class	4	4	4	4	4
Energy Consumption	N/A	N/A	N/A	N/A	N/A
Power Supply	13 amp plug	13 amp plug	13 amp plug	13 amp plug	13 amp plug
Voltage	230/1N 50HZ	230/1N 50HZ	230/1N 50HZ	230/1N 50HZ	230/1N 50HZ
Cooling System	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
Defrost Type	Automatic	Automatic	Automatic	Automatic	Automatic
Upper Lighting	LED	LED	LED	LED	LED
Shelf Lighting	No	No	No	No	No
Digital Display	Yes	Yes	Yes	Yes	Yes
Lockable	No	No	No	No	No
Castors	Yes	Yes	Yes	Yes	Yes
Frost Free	No	No	No	No	No