

EC 57 EcoX XSafe

Scotsman
Ice Systems

Self Contained Ice Machine 33 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |



FEATURES

- Produces individual Gourmet crystal clear ice cubes.
- Resistant stainless steel exterior.
- Advanced diagnostics computerized controls.
- Front panel in and out airflow (air-cooled model only) for built-in installation.
- Front access condenser air filter, removable and washable (air cooled model only).
- Ergonomically designed ice storage access, with disappearing door. Door-closing movement dampening system.
- Water system protected by patented anti-scale system.
- PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters.
- Legs are not included and must be ordered separately as an accessory.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



EC M 57
Medium Gourmet 20 g
Ø 30 x H 34 mm



EC S 57
Small Gourmet 8 g
Ø 21 x H 25 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

12 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

| | Minimum | Maximum |
|--------------------|----------------|----------------|
| Air temperature | 10 | 43 |
| Water temperature | 5 | 38 |
| Water pressure | 1 bar (14 psi) | 5 bar (70 psi) |
| Electrical voltage | -10% | +10% |

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.


www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 33 kg

Self Contained Ice Machine 33 kg

| |
|-----------|
| Item #: |
| Project: |
| Quantity: |

Self Contained Ice Machine 33 kg

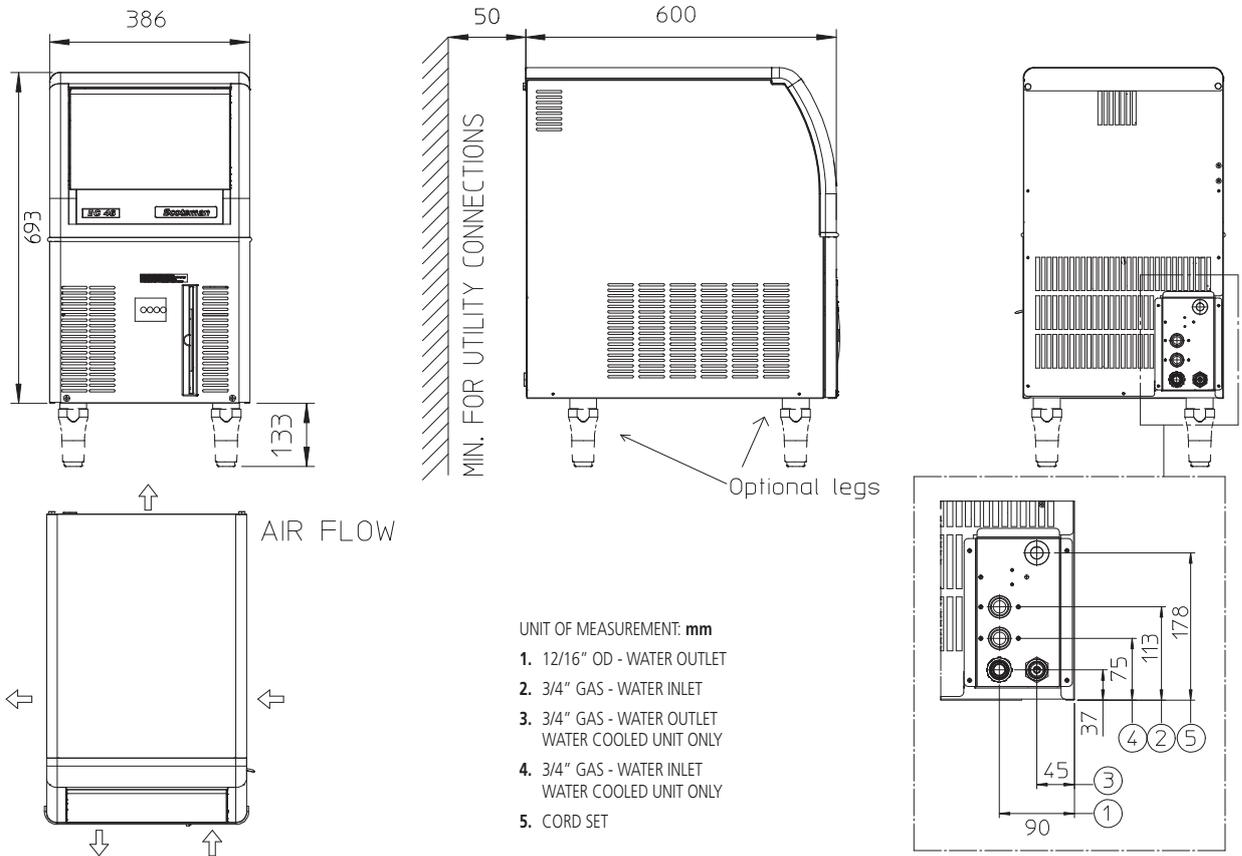

| UNIT DATA | | SHIPPING DATA | | | | | | | | | |
|------------------|--------------------|--|--------------------|-----------------|------------------------|-------------|-----------------|---------------|------------|------------------------|----------------|
| Size (W x D x H) | 386 x 600 x 695 mm | Carton (W x D x H) | 460 x 670 x 810 mm | | | | | | | | |
| Net weight | 38 kg | Weight | 45 kg | | | | | | | | |
| Version | Voltage | 24 h ice production kg °C Amb. / °C Water | | | Energy consumption (*) | | Water usage (*) | Instant power | Compressor | Circuit wires | Max. fuse size |
| | | 10°C/10°C kg | 21°C/10°C kg | 32°C/21°C kg | kWh/ 100 kg | kWh/ 24h | l/h | W | W | No. x Ømm ² | A |
| ECM 57 AS | 230/50/1 | 33 | 31 | 25 | 27.0 | 6.6 | 4.0 | 370 | 730 | 1 x 1.5 | 10 |
| ECM 57 WS | 230/50/1 | 34 | 33 | 29 | 19.7 | 5.7 | 23.4 | 300 | 730 | 1 x 1.0 | 10 |
| ECS 57 AS | 230/50/1 | 28 | 27 | 22 | 30.9 | 6.8 | 4.0 | 370 | 730 | 1 x 1.0 | 10 |

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions