



ESLR6C - Lincat Silverlink 600 Electric Free-standing Oven Range - Castors at Rear - 4 Plates - W 600 mm - 11.0 kW

Produce a wide range of delicious food with the large capacity fan assisted oven and four hotplates.

- ✓ Compact 600mm deep footprint - perfect for care homes as well as smaller pubs and restaurants
- ✓ Four hotplates 2 x 2.0kW, 2 x 1.5kW with six-position control knob for each plate - higher power for sautéing at the front, lower power to the rear ideal for simmering
- ✓ Automatic power reduction, if the pan boils dry or is removed, prolonging hotplate life
- ✓ Easy clean fully pressed and sealed hob
- ✓ Powerful 4kW fan assisted oven for uniform heat distribution and consistent cooking
- ✓ To suit install requirements, the ESLR6C can be wired as either single or three phase
- ✓ Double insulated doors, side and back panels providing safer operation, greater efficiency and economy
- ✓ Castors at rear to enable unit to be pulled out for deeper cleans

Specifications

Summary		Power and Performance	
Brand	Lincat	Total Power kW	11.0
Range	Silverlink 600	Temperature Range °C	50-250
Power Type	Electric	IP Rating	IP34
Unit Type	Free-standing	Cooking Area (Width x Depth) mm	600 x 600
Available in UK Only	No	Temperature Control	Mechanical
UK Warranty	2 Years Parts and Labour Warranty	Rating per Hob kW	2 x 2.0, 2 x 1.5
Export Warranty	Contact your local dealer	Oven Rating kW	4.0
GTIN	5056105121336		

Key Specifications

Number of Shelves included	2
Number of Shelf Positions	4
Number of Hobs	4
Shape of Hob	Round

Weights and Dimensions		Supply Connections	
Unit Height (External) mm	932	Requires Installation	Yes
Unit Width (External) mm	600	Requires Electrical Supply	Yes
Unit Depth (External) mm	670	UK 3 Pin Plug	No
Height (Internal) mm	428	Requires Hardwiring	Yes
Width (Internal) mm	470	Electrical Supply Rating Watts	11,000
Depth (Internal) mm	350	Single Phase Amps	47.8
Shelf Dimensions Width mm	455	Single Phase Voltage	230
Shelf Dimensions Depth mm	335	Three Phase Amps	L1=17.4; L2=15.2; L3=15.2
Hob Dimensions mm	600 x 600	Three Phase Voltage	400
Net Weight Kg	60		

Shipping


Packed Weight Kg	66
Packed Height cm	110
Packed Width cm	70
Packed Depth cm	80

Available Accessories

SLR6/SB

SPLASHBACK SLR6

Technical Picture

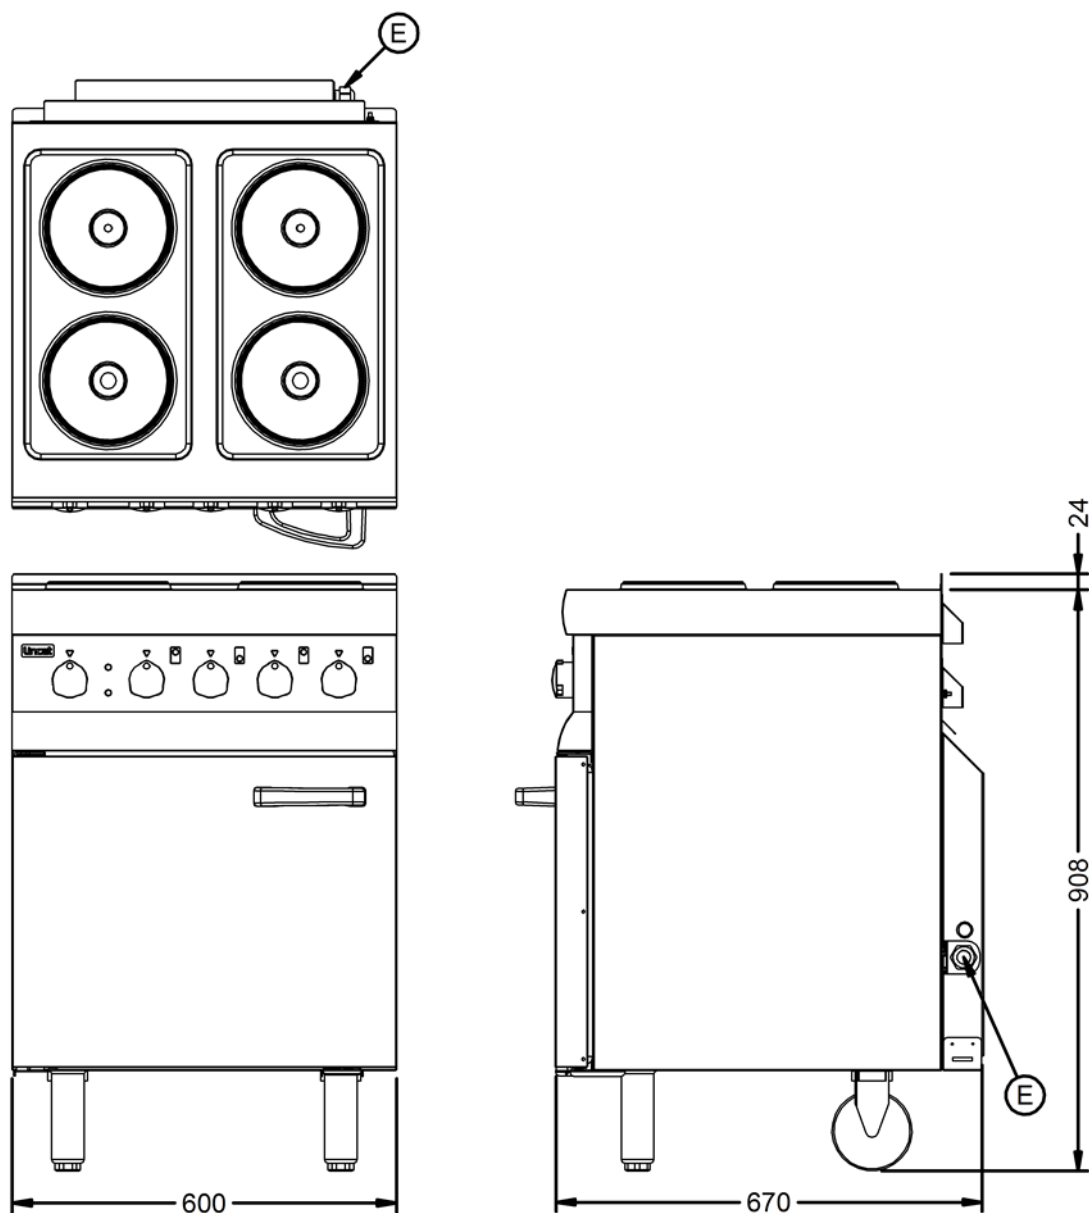



Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday:

8.30am – 5pm