lincat





ESLR9C/SPH - Lincat Silverlink 600 Electric Free-standing Oven Range - Castors at Rear -6 Plates - W 900 mm -13.0 kW [1-Phase] This powerful six-plate electric range with a twin fan-assisted oven has the ability to cook large volumes of quality food, making it the ultimate solution for pubs, cafés, care homes and community centres on a single phase supply.

- Compact 600mm deep footprint perfect for care homes as well as smaller pubs and restaurants
- Six hotplates 3 x 2.0kW, 3 x 1.5kW with six-position control knob for each plate - higher power for sautéing at the front, lower power to the rear ideal for simmering
- Automatic power reduction, if pan boils dry or is removed - prolonging hotplate life
- Easy clean fully pressed and sealed hob

- Powerful 4kW twin fan assisted oven for uniform heat distribution and consistent cooking
- Double insulated doors, side and back panels providing safer operation, greater efficiency, and economy
- Castors at rear to enable unit to be pulled out for deeper cleans

Specifications

Summary		Power and Performance	
Brand	Lincat	Total Power kW	13.0
Range	Silverlink 600	Temperature Range °C	50-250
Power Type	Electric	IP Rating	IP34
Unit Type	Free-standing	Temperature Control	Mechanical
Available in UK Only	No	Rating per Hob kW	6×1.5
UK Warranty	2 Years Parts and Labour Warranty	Oven Rating kW	4.0
Export Warranty	Contact your local dealer		
GTIN	5056105116424		
Key Specifications			
Number of Shelves included	2		
Number of Shelf Positions	4		
Number of Hobs	6		

Weights and Dimensions

Round

Shape of Hob

Unit Height (External) mm	932	Requires Installation	Yes
Unit Width (External) mm	900	Requires Electrical Supply	Yes
Unit Depth (External) mm	670	UK 3 Pin Plug	No
Height (Internal) mm	428	Requires Hardwiring	Yes
Width (Internal) mm	725	Electrical Supply Rating Watts	13,000
Depth (Internal) mm	342	Single Phase Amps	56.5[1supp.]; 30.4/26.1[2supp.]
Shelf Dimensions Width mm	700	Single Phase Voltage	230
Shelf Dimensions Depth mm	342		
Hob Dimensions mm	W900 × D600		
Net Weight Kg	95		

Supply Connections



SILVERLINK 600

Shipping


Packed Weight Kg	104.5
Packed Height cm	110
Packed Width cm	100
Packed Depth cm	81


Available Accessories


SLR9/SB

SPLASHBACK SLR9/FL

Technical Picture





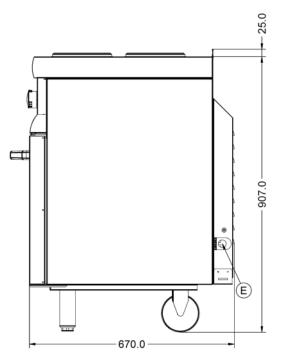



SILVERLINK 600

Lincat frifri

Lincat Limited

Whisby Road, Lincoln, LN6 30Z,

United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500 Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday – Friday: 8.30am - 5pm