

Drop-In: Hot-Top

Overview

Hot Display with individual, Neo - Ceram glass, GN 1/1 size, thermo panels collectively governed by an energy regulating control. Designed to maintain Precooked food at serving temperature. They are not induction type units which require dedicated food pans, and apart from cast iron can be used with any suitable heatproof food container. Chafing dishes are not required. The surface temperature of the panels is adjustable to a maximum of 100°C. Complete with an aesthetic gantry hood above fitted with large quartz heat lamps, Providing an illuminated display area and additional heat source.



Key Features:


- Simply drop into place and plug into a 13amp power outlet
- All controls are fitted in the gantry hood for easy install, commissioning and operation
- Alternative panel mounted remote control Box on models with no overhead gantry
- Gantry ends light up indicating display is on
- Available in Curved or Square glass profiles
- 24/7 operation
- Self-contained unit. Electrics are integral no awkward fitting under counter control boxes.
- 13amp plug and go
- Ready to Insert into any new or existing ambient counter structure
- Guaranteed evenly distributed heat with no hot spots
- Even flat surface with no distortion or discolouring

Options::

- Double sided Island Glass Curved or Shear line type
- Heavy Duty spiked Stainless
 Steel Carving pad (Code: VCCP)



This unit features Moffat's unique, Neo-Ceram glass, GN 1/1 size, thermo panels.

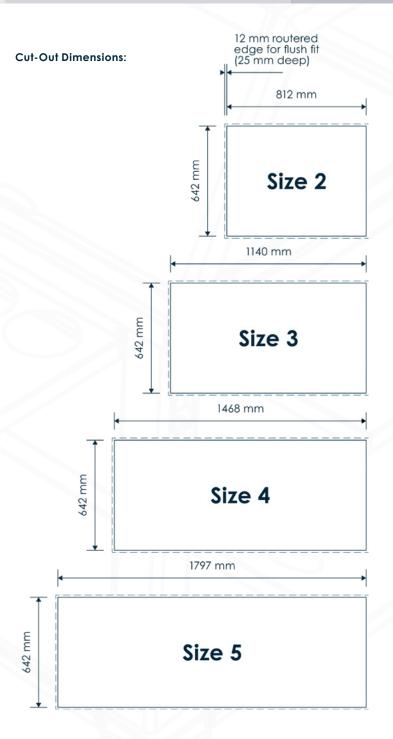









Quartz

	Model	Weight (kg)	L x W (mm)	Height above display top	No. of 180w Neo Ceram Hot Plates	No. of 220w Iamps	Electrical Supply	Power Rating (kw)	
1. No Gantry	D2HTNG D3HTNG D4HTNG D5HTNG	18 24 31 39	830 x 660 1158 x 660 1486 x 660 1814 x 660	0 0 0 0	2 3 4 5	N/A N/A N/A N/A	13amp 13amp 13amp 13amp	0.36 0.54 0.72 0.90	
2. Curved Glass Open Front	D2HT D3HT D4HT D5HT (+ "I" to er	24 31 39 48 d of model co	830 x 660 1158 x 660 1486 x 660 1814 x 660 de for island ma	408 408 408 408 del with doubl	2 3 4 5 le sided, curved gla	1 2 3 4 ss screen)	13amp 13amp 13amp 13amp	0.58 0.98 1.38 1.78	
3. Curved Glass Closed Front	D2HTF D3HTF D4HTF D5HTF	36 46 57 68	830 x 660 1158 x 660 1486 x 660 1814 x 660	408 408 408 408	2 3 4 5	1 2 3 4	13amp 13amp 13amp 13amp	0.58 0.98 1.38 1.78	
4. Square Glass Open Front	D2HTSL D3HTSL D4HTSL D5HTSL (+ "I" to er	30 40 51 63 nd of model co	830 x 660 1158 x 660 1486 x 660 1814 x 660 de for island m	396 396 396 396 396 odel with doub	2 3 4 5 le sided, square gla	1 2 3 4 ss screen)	13amp 13amp 13amp 13amp	0.58 0.98 1.38 1.78	
5. Square Glass Closed Front	D2HTSLF D3HTSLF D4HTSLF D5HTSLF	38 48 59 71	830 x 660 1158 x 660 1486 x 660 1814 x 660	396 396 396 396	2 3 4 5	1 2 3 4	13amp 13amp 13amp 13amp	0.58 0.98 1.38 1.78	
6. Curved Glass Deli (shelf not heated)	D2HTD D3HTD D4HTD D5HTD	34 46 57 68	830 x 660 1158 x 660 1486 x 660 1814 x 660	540 540 540 540	2 3 4 5	1 2 3 4	13amp 13amp 13amp 13amp	0.58 0.98 1.38 1.78	
7. Square Glass Deli (shelf not heated)	D2HTDSL D3HTDSL D4HTDSL D5HTDSL	38 48 59 71	830 x 660 1158 x 660 1486 x 660 1814 x 660	540 540 540 540	2 3 4 5	1 2 3 4	13amp 13amp 13amp 13amp	0.58 0.98 1.38 1.78	





E&R Moffat Ltd. Bonnybridge FK4 2BS Scotland



f





www.ermoffat.co.uk +44 (0) 1324 812272 sales@ermoffat.co.uk